




Copyright 2025
www.dghongming.com
鸿铭股份订阅号

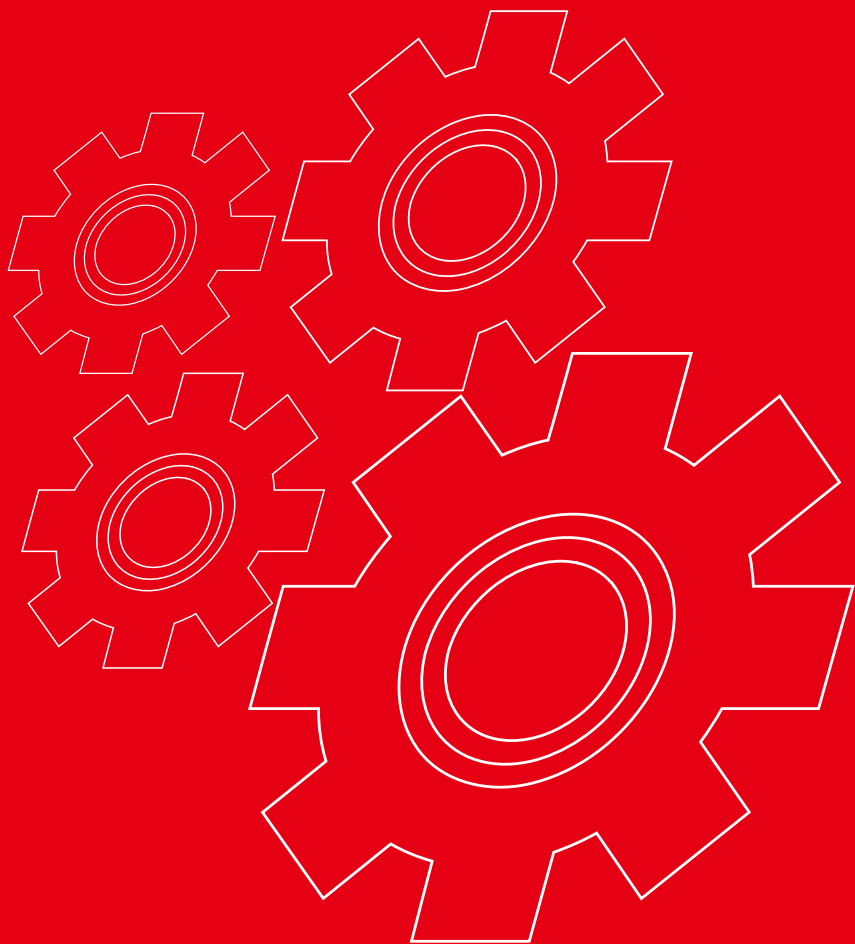

广东鸿铭智能股份有限公司

GUANGDONG HONGMING
INTELLIGENT JOINT STOCK CO.,LTD

Add: 广东省东莞市东城街道同沙同欢路7号

Tel: +86-769-22187142

Fax: +86-769-22187699

E-mail: hongming@dghongming.com

Website: www.dghongming.com

※由于产品设计不断改良，以上图片以及参数仅供参考。如有更改，恕不另行通知。
Due to the continuous product improvement, the photos and parameters are for your reference only.



Copyright 2025 Hongming



股票代码：301105

鸿铭股份之 **至嵘**
HONGMING STOCK ZHIRONG

广东鸿铭智能股份有限公司

GUANGDONG HONGMING INTELLIGENT JOINT STOCK CO.,LTD

www.dghongming.com

● 公司简介	-----	01
Introduction		
● HM-DP4030D 全自动智能制盒机	-----	02-05
Automatic Rigid Box Machine		
● HM-DP4030A 全自动智能制盒机	-----	06-09
Automatic Rigid Box Machine		
● HM-DP4030S/HM-DP4030S-S 数字化精品盒生产线	-----	10-13
Digital Rigid box production line		
● HM-DP4030P/HM-DP4030P-S 数字化精品盒生产线	-----	14-17
Digital Rigid box production line		
● HM-DP4030M 全自动智能制盒机	-----	18-21
Automatic Rigid Box Machine		
● HM-DP4030M-A 全自动智能制盒机	-----	22-25
Automatic Rigid Box Machine		
● HM-DP6545D/HM-DP6545C 全自动智能制盒机	-----	26-29
Automatic Rigid Box Machine		
● HM-DP6545A/HM-DP6545B 数字化精品盒生产线	-----	30-33
Digital Rigid box production line		
● 注释	-----	34
note		
● 产品应用	-----	35-37
Product application		





公司简介

Introduction

广东鸿铭智能股份有限公司（以下简称“鸿铭股份”）是专注研发制造智能机械设备的集团公司。鸿铭股份起源于1999年，坐落于美丽的粤港澳大湾区--广东省东莞市，公司为国内包装行业从手工制作过渡到机器生产开创先河，是国内首家礼盒设备生产厂家。同时鸿铭股份为国内行业内首家A股上市公司，股票代码为301105。鸿铭股份下属全资子公司有：东莞市鸿博科技有限公司；江苏鸿禧科技有限公司，集团研发及生产面积近20万平方米。

历经20多年的精耕细作、开拓进取、与时俱进，鸿铭股份成为国家知识产权优势企业、东莞市百强企业、拥有省级工程技术研究中心等诸多荣誉。公司拥有近300项专利，60多项软件著作权，同时公司通过了欧盟CE认证及ISO质量管理体系认证。

强大的研发团队、精密的智能制造能力、高效的销售团队以及专业的售后服务体系，在广大客户的支持和认可下，鸿铭股份设备远销德国、欧美及东南亚多个国家，在国内外市场占居极大份额。

鸿铭股份生产多系列全智能和全自动半自动制盒机以及印后包装所需的其他配套设备。广泛应用于各类精品包装盒、手机盒、珠宝盒、化妆品盒、鞋盒、服装盒、食品盒、酒盒以及其它精品盒的生产和制作。

鸿铭股份为您一站式提供植物纤维、纸浆模塑整套自动化解决方案及智能化产品整套生产线。广泛应用于各类工业纸托及植物纤维餐具的生产和制作。

鸿铭股份以秉持领先技术、倡导行业风范、标志上乘品质、推动工业文明为公司运营发展宗旨，鸿铭股份会一如既往让产品高度融合市场、品质信誉至上；以客户需求为核心、不断开拓创新。欢迎广大新老客

Guangdong Hongming Intelligent Joint Stock Co., Ltd. (hereinafter referred to as "Hongming Stock") is a group company focusing on the research, development and manufacturing of intelligent machinery and equipment. Hongming Stock originated in 1999 and is located in the beautiful Guangdong-Hong Kong-Macao Greater Bay Area - Dongguan City, Guangdong Province. The company is the first manufacturer of gift box equipment in China, pioneered the transition from manual production to machine production in the domestic packaging industry. At the same time, Hongming Stock is the first A-share listed company in the domestic industry, with a stock code of 301105. The wholly-owned subsidiaries of Hongming Stock are: Dongguan Hongbo Technology Co., Ltd., Jiangsu Hongxi Technology Co., Ltd., with a research and development and production area of nearly 200,000 square meters.


After more than 20 years of intensive cultivation, pioneering and enterprising, and advancing with the times, Hongming Stock has become a national intellectual property advantage enterprise, a top 100 enterprise in Dongguan, and has many honors such as a provincial engineering technology research center. The company has nearly 300 patents and more than 60 software copyrights. At the same time, the company has passed the EU CE certification and ISO quality management system certification.

Strong R & D team, sophisticated intelligent manufacturing capabilities, efficient sales team and professional after-sales service system, with the support and recognition of our customers, Hongming Stock's equipment is exported to Germany, Europe, America and many countries in Southeast Asia, which has occupied a large share at home and abroad.

Hongming Stock produces multiple series of fully intelligent, fully automatic, semi-automatic rigid box making machines and other supporting equipment required for post-press packaging, which are widely used in the production of various high-quality packaging boxes, mobile phone boxes, jewelry boxes, cosmetic boxes, shoe boxes, clothing boxes, food boxes, wine boxes and other premium boxes.

Hongming Stock provides you with a complete set of automation solutions and intelligent production lines for plant fiber and pulp molding in one stop, which are widely used in the production of various industrial pulp trays and molded fiber tableware.

Hongming Stock takes upholding leading technology, advocating industry style, marking superior quality, and promoting industrial civilization as the company's operation and development purpose. Hongming Stock will, as always, make products highly integrated with the market, put quality and reputation first, take customer needs as the core, and continue to develop and innovate. Welcome all the new and old customers to visit. Hongming Stock is looking forward to win-win cooperation with you!

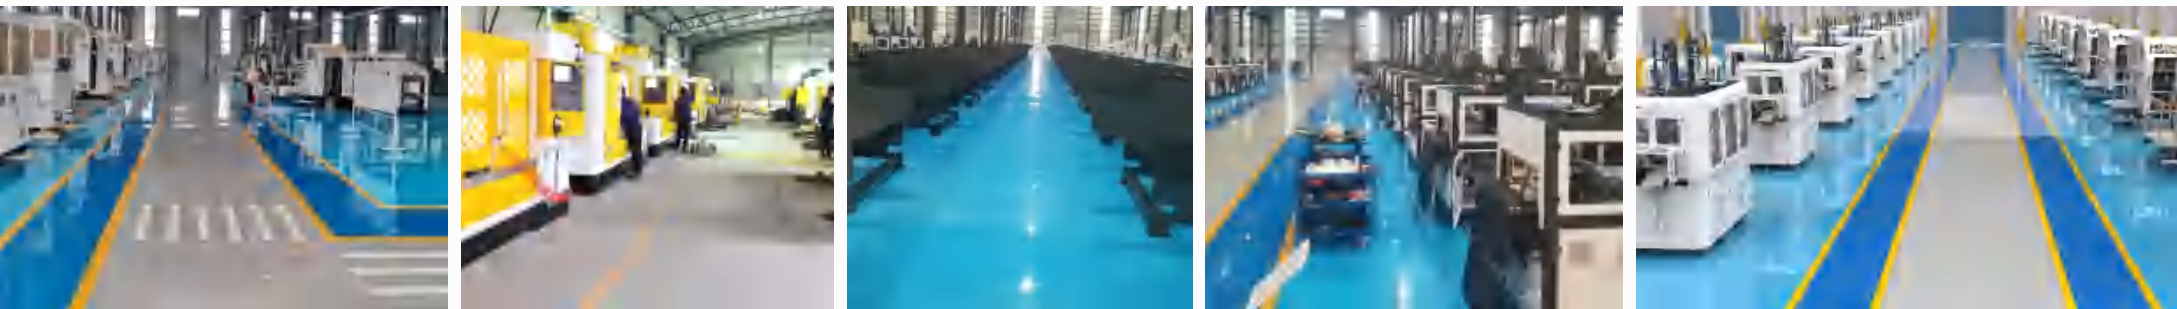

公司荣誉与发展

Company honor and development




通过26年的不懈努力，我们逐步成为业内一流的设备制造企业，并先后取得了各种不同的资质和荣誉，这将促使我们为客户提供更完善的服务质量。

With 26 years constant efforts, we gradually become a first-class equipment manufacturer in this industry. We also acquired various qualifications and honors. These guarantee us to provide more comprehensive services for our customers.



鸿铭股份之 至嵘

HONGMING STOCK ZHIRONG



HM-DP4030D



全自动智能制盒机 >>> Automatic Rigid Box Machine

功能说明 >>> Description

HM-DP4030D 是一款针对常规尺寸精品盒，旨在突出高速生产的双工位全自动智能制盒机，适用于多种盒型的大量生产，如高档珠宝盒、手机盒、首饰盒、礼品盒、化妆品盒、手表盒等等，最大能到400mm长，300mm宽，做盒范围更大，更能满足现代包装市场的需求。整机外观经过全新设计，更加安全及美观。

本机采用伺服控制系统、图像定位系统，实现进纸、过胶、进灰板、贴四角、定位、抱盒、包边、折耳和折入成型自动完成。

在飞达、过胶和输送带使用知名品牌伺服驱动，可无极变速，高精度，易调节，省时间；定位部分采用图像定位系统及机器人抓取部件，提高定位精度及效率，误差范围在±0.05mm，且速度更快；成型机采用日本进口THK线性导轨和虚拟电子凸轮驱动，更稳定耐磨且动作更流畅，折入深度及折耳长度尺寸范围也更大。

HM-DP4030D Automatic Rigid Box Machine with Double Wrapper, which suitable for medium-size premium boxes in mass production. It is suitable to make various types of rigid boxes such as jewelry boxes, mobile phone boxes, gift boxes, cosmetic boxes, watch boxes, etc. Its maximum length 400mm and maximum width 300mm,Size range is bigger, more suitable for current packaging market. Machine's appearance is new design which is safer and more beautiful.

HM-DP4030D adopts PLC and man-machine control, camera tracing system, and can automatically feed cover paper, feed greyboard, paste four corners, spot greyboard, lift box, wrap box, fold corner edges and form box.

The feeder, the gluer and the conveyor are driven by servos, the machine has continuously variable transmission and enjoys high accuracy, easy adjusting, and less time consumption. The spotting unit adopts camera tracing system and robot arm to pick and spot the greyboard ,enhancing the spotter accuracy to ± 0.05mm. The forming unit employs Japan THK linear slider and virtual cam driving system, guaranteeing the stable quality and fluent movement and enlarge the folding-in depth and corner edges.



过胶部分
Glue part




定位部分
Spotter part



贴角部分
Corner pasting part



成型部分
Wrapper part

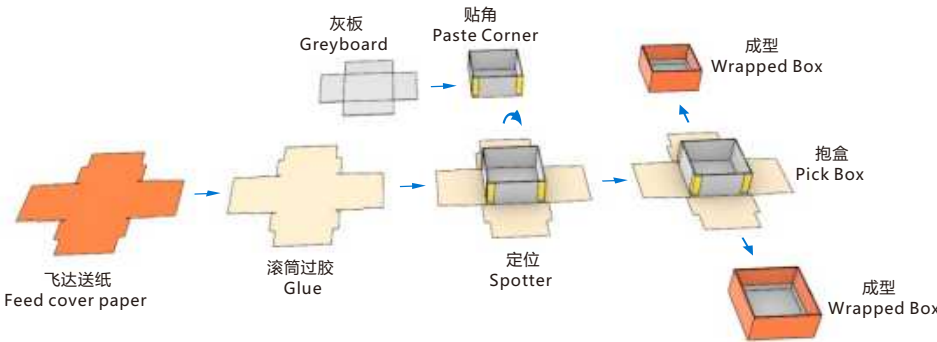

全自动智能制盒机 >>> Automatic Rigid Box Machine

>机组特点和标准配置

1. 适合各种天地盖硬盒的自动生产;

2. 双工位成型; (详见注释)

3. 参数化智能调节;

4. 长边、短边分层包边成型;

5. 凸轮箱可整体参与运动控制; (详见注释)

6. 全电脑功能参数的设置;

7. 出盒方向平行于主输送带;

8. 故障诊断功能;

9. 自动吸送面纸和送灰板功能;
10. 24小时胶水定时加热功能;

11. 成型机内置300项产品配方;

12. 四角贴角加热单独人机界面控制; (详见注释)

13. 多功能机器人视觉影像定位系统(定位误差±0.05mm); (详见注释)

14. 成型部分自动抬盒引取装置; (详见注释)

15. 胶水粘度自动控制系统(选配); (详见注释)

16. 自动换模功能(选配); (详见注释)

17. 伺服底模; (详见注释)

18. 拉模部件与主滑块同步; (详见注释)

>Features and function:

1. Suit to all kinds of rigid boxes in mass production;

2. Double-station forming;

3. Parametric intelligent adjustment;

4. The long side and short side are layered and formed;

5. The cam box can participate in motion control as a whole; (Details please check the note)

6. Parameters adopts computer digital setting ;

7. The box-out direction is parallel to the main conveyor belt;

8. Auto error stop and display;

9. Automatic feed paper and greyboard;

10. 24-hour glue timing heating function;

11. Wrapper can input 300 product formulas;

12. Corner pasting part with independent man-machine control and heating system; (Details please check the note)

13. Multifunctional Robot Vision Image Positioning System (spotting accuracy ±0.05mm); (Details please check the note)

14. Wrapper can automatic lift and wrap box; (Details please check the note)

15. Automatic control system for glue viscosity(optional); (Details please check the note)

16. Digital setting with memory system(optional); (Details please check the note)


17. Bottom mould use Piston type; (Details please check the note)

18. Main Slider and pull mold section synchronized; (Details please check the note)

>主要技术参数/Technical parameters


型号 Model	HM-DP4030D	
灰板尺寸 Greyboard Size (D=Length, C=Width)	最长尺寸D(Max.)	510mm
	最短尺寸D(Min.)	80mm
	最宽尺寸C(Max.)	410mm
	最窄尺寸C(Min.)	70mm
	灰板厚度Thickness (T)	0.5-3mm
面纸尺寸 Paper Size (B=Length, A=Width)	最长尺寸B(Max.)	600mm
	最短尺寸B(Min.)	180mm
	最宽尺寸A(Max.)	455mm
	最窄尺寸A(Min.)	70mm
	面纸厚度Thickness	80-160gsm
盒子尺寸 Finished Box Size (L=Length W=Width H=Height)	最长尺寸L(Max.)	400mm
	最短尺寸L(Min.)	60mm
	最宽尺寸W(Max.)	300mm
	最窄尺寸W(Min.)	50mm
	最高尺寸H(Max.)	110mm
折耳尺寸 Paper Corner Edge(E)	最矮尺寸H(Min.)	10mm
	E	10-90mm
面纸折入深度 Folding in Depth(R)	R	10-80mm
面纸堆台最高 Paper Pile Height Max.	750mm	
灰板堆台最高 Greyboard Pile Height Max.	850mm	
胶桶容量 Glue Tank Volume	20L	
气源压力 Air Supply	460L/min,0.8MPa	
生产速度 Speed	≤50pcs/minutes	
总功率 Total Power/电压 Voltage	39kW/AC380V	
耗电量 Power Consumption	9.75kW/h	
机器净重 Net Weight	5200kg	
—机器尺寸 Machine Dimension—	6000x5000x3400mm	

- 1、标准型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件, 才能完成产品的制作)。
For standard type boxes, the following technical specifications must be met.

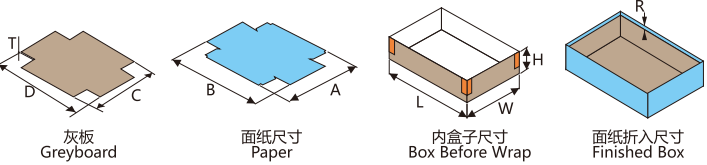

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 2、对接型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件, 才能完成产品的制作)。
For special boxes (paper corner edge = half of finished box width), the following technical specifications must be met.

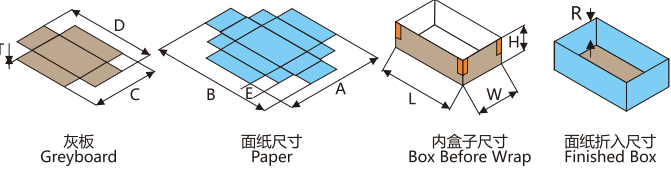


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

备注/Note:


- 1、盒子大小由面纸大小决定; The Finished Box Max. sizes are determined by paper size.
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$; $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$
- 2、最大和最小尺寸不能同时满足; Either the Max. Sizes or the Min. Sizes can not be fulfilled on the same box.
- 3、做高度110mm的盒子时, 盒子的长度需>80mm; 若盒子的长度<80mm,盒子的高度最大为90mm。
If finished box height is 110mm,the length>80mm;when the length <80mm,the finished box height≤90mm
- 4、生产速度由盒子大小和面纸灰板的材质来决定;
The production speed of the rigid box machine is determined by the box size, the paper and the greyboard materials.
- 5、我司不提供空压机,空压机压力需求为8atm=0.808MPa,空压机功率:7.5kW。
Seller doesn't provide air compressor. (8atm=0.808MPa, 7.5kW compressor is needed).

- 3、包深型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件,才能完成产品的制作)。
For deep wrapped boxes, the following technical specifications must be met.

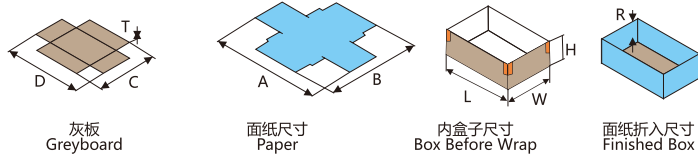

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 4、对搭折耳型天地盖面纸及灰板的尺寸范围 (在技术参数上必须满足以下条件才能完成产品的制作)。
For special boxes (paper corner edge = finished box width), the following technical specifications must be met.



操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

HM-DP4030A



全自动智能制盒机 >>> Automatic Rigid Box Machine

功能说明 >>> Description

HM-DP4030A 是一款针对常规尺寸精品盒,旨在突出快速换模的的全自动智能制盒机.适用于多种盒型的大量生产, 如高档珠宝盒、手机盒、首饰盒、礼品盒、化妆品盒、手表盒等等, 最大能到400mm长, 300mm宽。做盒范围更大, 更能满足现代包装市场的需求。整机外观经过全新设计, 更加安全及美观。

本机采用伺服控制系统、图像定位系统, 实现进纸、过胶、进灰板、贴四角、定位、抱盒、包边、折耳和折入成型自动完成。

在飞达、过胶和输送带使用知名品牌伺服驱动, 可无极变速, 高精度, 易调节, 省时间; 定位部分采用图像定位系统及机器人抓取部件, 提高定位精度及效率, 误差范围在±0.05mm, 且速度更快; 成型机采用THK线性导轨和虚拟电子凸轮驱动, 更稳定耐磨且动作更流畅, 折入深度及折耳长度尺寸范围也更大。


HM-DP4030A Automatic rigid box machine is for making premium boxes of regular size, which is digital setting with memory system. It is suitable for mass production of various box types, such as high-end jewelry boxes, mobile phone boxes, jewelry boxes, gift boxes , cosmetics boxes, watch boxes etc, the biggest box can reach 400 mm in length and 300 mm in width. The range of boxes is larger and can meet the needs of the modern packaging market. The appearance of the whole machine has been completely redesigned to be safer and more beautiful.

This machine adopts PLC and man-machine control system and camera tracing system to feed paper, gluing, feed greyboard , pasted four corners, spot greyboard, lift box, fold corner edges and wrap box automatically.

The feeder, the gluer and the conveyor are driven by servos, the machine has continuously variable transmission and enjoys high accuracy, easy adjusting, and efficiency. The spotting unit adopts camera tracing system and robot arm to pick and spot the greyboard, enhancing the spotter accuracy to ±0.05mm. The forming unit adopts Japan THK linear slider and virtual electronic cam driving system, guaranteeing the stable quality and fluent movement and enlarge the folding-in depth and corner edges.



过胶部分
Glue part

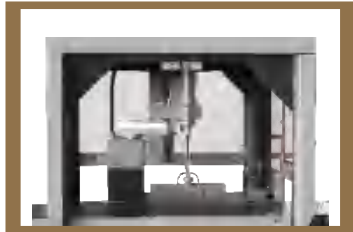


定位部分
Spotter part



贴角部分
Corner pasting part



成型部分
Wrapper part

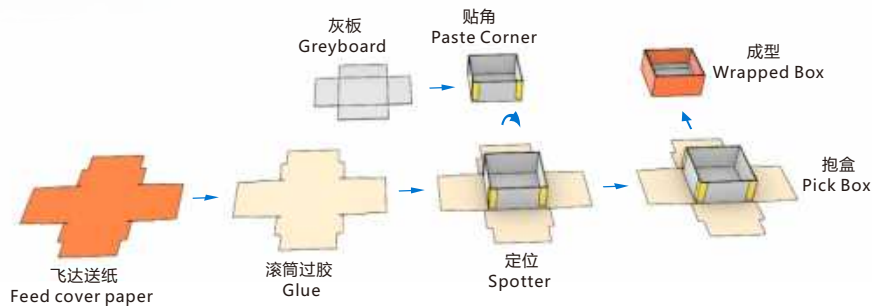

全自动智能制盒机 >>> Automatic Rigid Box Machine

> 机组特点和标准配置

1. 适合各种天地盖硬盒的自动生产;

2. 单工位成型;

3. 参数化智能调节;

4. 长边、短边分层包边成型;

5. 凸轮箱可整体参与运动控制;（详见注释）

6. 全电脑功能参数的设置和自动换模功能(选配);

7. 出盒方向平行于主输送带;

8. 故障诊断功能;

9. 自动吸送面纸和送灰板功能;
10. 24小时胶水定时加热功能;

11. 成型机内置300项产品配方;

12. 四角贴角加热单独人机界面控制;（详见注释）

13. 多功能机器人视觉影像定位系统(定位误差±0.05mm);（详见注释）

14. 成型部分自动抬盒引取装置;（详见注释）

15. 胶水粘度自动控制系统(选配);（详见注释）

16. 伺服底模;（详见注释）

17. 拉模部件与主滑块同步;（详见注释）

> Features and function:

1. Suit to all kinds of rigid boxes in mass production;

2. Single Wrapper;

3. Parametric intelligent adjustment;

4. The long side and short side are layered and formed;

5. The cam box can participate in motion control as a whole; (Details please check the note)

6. Parameters adopts computer digital setting;

7. The box-out direction is parallel to the main conveyor belt;

8. Auto error stop and display;

9. Automatic feed paper and greyboard;

10. 24-hour glue timing heating function;

11. Wrapper can input 300 product formulas;

12. Corner pasting part with independent man-machine control and heating system; (Details please check the note)

13. Multifunctional Robot Vision Image Positioning System (spotting accuracy ±0.05mm); (Details please check the note)

14. Wrapper can automatic lift and wrap box; (Details please check the note)

15. Automatic control system for glue viscosity (optional); (Details please check the note)


16. Bottom mould use Piston type; (Details please check the note)

17. Main Slider and pull mold section synchronized; (Details please check the note)

> 主要技术参数/Technical parameters


型号 Model	HM-DP4030A	
灰板尺寸 Greyboard Size (D=Length, C=Width)	最长尺寸D(Max.)	510mm
	最短尺寸D(Min.)	80mm
	最宽尺寸C(Max.)	410mm
	最窄尺寸C(Min.)	70mm
	灰板厚度Thickness (T)	0.5-3mm
面纸尺寸 Paper Size (B=Length, A=Width)	最长尺寸B(Max.)	600mm
	最短尺寸B(Min.)	180mm
	最宽尺寸A(Max.)	455mm
	最窄尺寸A(Min.)	70mm
	面纸厚度Thickness	80-160gsm
盒子尺寸 Finished Box Size (L=Length W=Width H=Height)	最长尺寸L(Max.)	400mm
	最短尺寸L(Min.)	60mm
	最宽尺寸W(Max.)	300mm
	最窄尺寸W(Min.)	50mm
	最高尺寸H(Max.)	110mm
折耳尺寸 Paper Corner Edge(E)	最矮尺寸H(Min.)	10mm
	E	10-90mm
面纸折入深度 Folding in Depth(R)	R	10-80mm
面纸堆台最高 Paper Pile Height Max.		600mm
灰板堆台最高 Greyboard Pile Height Max.		850mm
胶桶容量 Glue Tank Volume		20L
气源压力 Air Supply		460L/min,0.8MPa
生产速度 Speed		≤33pcs/min
总功率 Total Power/电压 Voltage		32kW/AC380V
耗电量 Power Consumption		8kW/h
机器净重 Net Weight		4300kg
—机器尺寸 Machine Dimension		6000x4500x3400mm

- 1、标准型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For standard type boxes, the following technical specifications must be met.

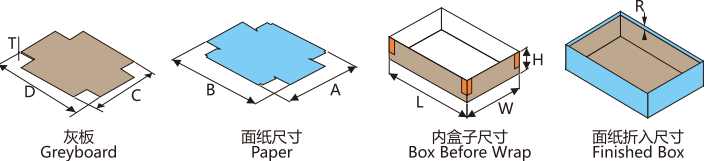

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 2、对接型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For special boxes (paper corner edge = half of finished box width), the following technical specifications must be met.

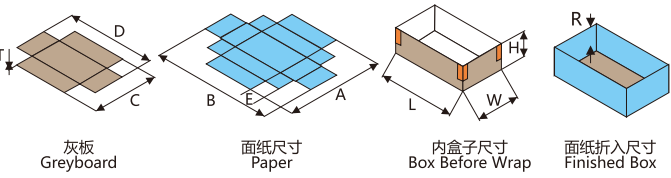

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

备注/Note:

- 1、盒子大小由面纸大小决定; The finished Box Max sizes are determined by paper size.
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$; $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$


2、最大和最小尺寸不能同时满足; Either the Max. Sizes or the Min. Sizes can not be fulfilled on the same box.

3、做高度110mm的盒子时，盒子的长度需>80mm; 若盒子的长度<80mm,盒子的高度最大为90mm。
If finished box height is 110mm,the length>80mm;when the length <80mm,the finished box height≤90mm

4、生产速度由盒子大小和面纸灰板的材质来决定;
The production speed of the rigid box machine is determined by the box size, the paper and the greyboard materials.


5、我司不提供空压机.空压机压力需求为8atm=0.808MPa,空压机功率:7.5kW。
Seller doesn't provide air compressor. (8atm=0.808MPa, 7.5kW compressor is needed)

- 3、包深型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件,才能完成产品的制作)。
For deep wrapped boxes, the following technical specifications must be met.

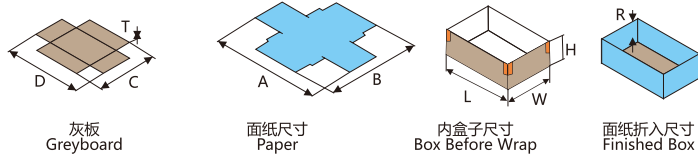

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 4、对搭折耳型天地盖面纸及灰板的尺寸范围（在技术参数上必须满足以下条件才能完成产品的制作）。
For special boxes (paper corner edge = finished box width), the following technical specifications must be met.



操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

HM-DP4030S/HM-DP4030S-S



数字化精品盒生产线 >>> Digital Rigid box production line

功能说明 >>> Description

HM-DP4030S/HM-DP4030S-S是一款全自动双通道智能制盒机。适用于多种盒型的天盒和地盒的同时生产，如手机盒、首饰盒、化妆品盒、手表盒等等。做盒范围更大，更能满足现代包装市场的需求。整机外观经过全新设计，更加安全及美观。

本机采用伺服控制系统、图像定位系统，实现进纸、过胶、进灰板、贴四角、定位、抱盒、包边、折耳和折入成型自动完成。

在飞达、过胶和输送带使用知名品牌伺服驱动，可无极变速，高精度，易调节，省时间；定位部分采用图像定位系统及机器人抓取部件，提高定位精度及效率，误差范围可达±0.05mm，且定位及调试速度更快；成型机采用THK线性导轨及虚拟电子凸轮驱动，更稳定耐磨且动作更流畅，折入深度及折耳长度尺寸范围也更大。

HM-DP4030S/HM-DP4030S-S is a fully automatic dual-channel Rigid box making machine. It is suitable for the simultaneous production of Top boxes and bottom boxes of various box types, such as mobile phone boxes, jewelry boxes, cosmetic boxes, watch boxes, etc. The range of making boxes is larger, which can better meet the needs of the modern packaging market. The appearance of the whole machine has been newly designed, which is safer and more beautiful.

This machine adopts servo control system and image positioning system to realize automatic completion of paper feeding, gluing, gray board feeding, four corner pasting, positioning, box holding, edge wrapping, ear folding and folding forming.


Servo drives of well-known brands are used in the feeder, gluing and conveyor belts, which can be infinitely variable, high-precision, easy to adjust, and save time; the positioning part uses image positioning systems and robots to grab parts to improve positioning accuracy and efficiency, and the error range can reach ±0.05mm, and the positioning and debugging speed is faster; the forming machine adopts THK linear guide rail and virtual electronic cam drive, which is more stable and wear-resistant, and the movement is smoother, and the size range of folding depth and



过胶部分
Glue part




定位部分
Spotter part

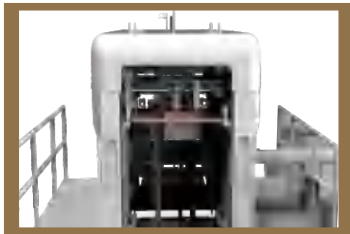

贴角部分
Corner pasting part



成型部分
Wrapper part

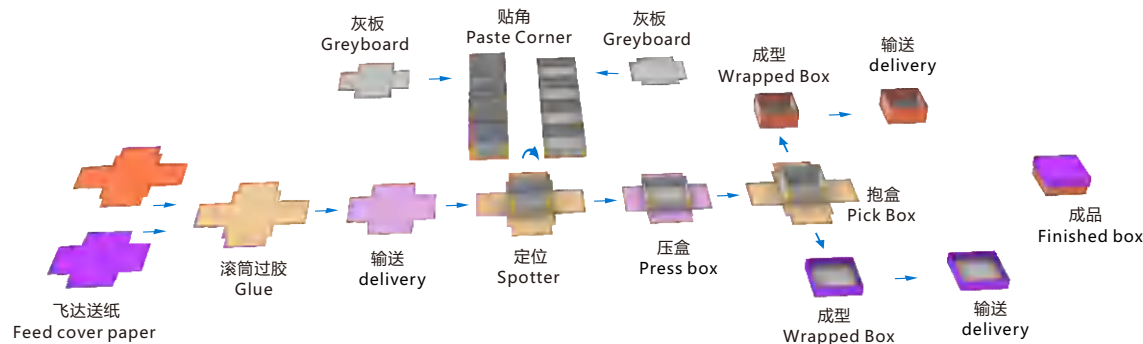

10 ※由于产品设计不断改良，以上图片以及参数仅供参考。如有更改，恕不另行通知。
Due to the continuous product improvement, the photos and parameters are for your reference only.

HM-DP4030S/HM-DP4030S-S



数字化精品盒生产线 >>> Digital Rigid box production line

>机组特点和标准配置

1. 适合各种硬纸天地盖自动生产线;

2. 双工位成型, 可同时完成天盒、地盒成型;

3. 参数化智能调节;

4. 长边、短边分层包边成型;

5. 凸轮箱可整体参与运动控制; (详见注释)

6. 可同时输送天盒、地盒的面纸及灰纸板功能;

7. 出盒方向平行于主输送带;

8. 24小时胶水定时加热功能;

9. 成型机内置300项产品配方;

10. 四角贴角加热单独人机界面控制; (详见注释)

11. 自动变换模具大小 (天盒、地盒共同一套);
12. 双通道出盒;

13. 多功能机器人视觉影像定位系统(定位误差±0.05mm); (详见注释)

14. 多功能高速直线电机与视觉影像处理系统配合的定位方式, 快速高效精准处理天盒、地盒分别定位; (详见注释)

15. 纸盒自动抬盒引取装置; (详见注释)

16. 胶水粘度自动控制系统(选配); (详见注释)

17. 全电脑功能参数的设置;

18. 故障诊断功能;

19. 伺服底模; (详见注释)

20. 拉模部件与主滑块同步; (详见注释)

>Features and function:

1. Suitable for all kinds of rigid box automatic production line;

2. Double-station molding can complete the molding of the top box and bottom box at the same time;

3. Parametric intelligent adjustment;

4. The long side and short side are layered and formed;

5. The cam box can participate in motion control as a whole; (Details please check the note)

6. Double-station feeding facial paper and gray cardboard function;

7. The box-out direction is parallel to the main conveyor belt;

8. 24-hour glue timing heating function;

9. The molding machine has built-in 300 product formulas;

10. The four-corner heating is controlled by a separate man-machine interface; (Details please check the note)

11. Automatically change the size of the mold (a set of top box and bottom box);

12. Dual-channel for box exit

13. Multifunctional Robot Vision Image Positioning System (positioning error ±0.05mm); (Details please check the note)

14. The positioning method of multi-functional high-speed linear motor and visual image processing system can quickly, efficiently and accurately process the positioning of the top box and bottom box; (Details please check the note)

15. Rigid box automatic lifting and extraction device; (Details please check the note)

16. Glue viscosity automatic control system (optional); (Details please check the note)

17. Setting of all computer function parameters;


18. Auto error stop and display;

19. Bottom mould use Piston type; (Details please check the note)


>主要技术参数/Technical parameters

型号 Model		HM-DP4030S	HM-DP4030S-S
灰板尺寸 Greyboard Size (D=Length, C=Width)	最长尺寸D(Max.)	510mm	510mm
	最短尺寸D(Min.)	80mm	80mm
	最宽尺寸C(Max.)	410mm	410mm
	最窄尺寸C(Min.)	70mm	70mm
	灰板厚度Thickness	0.5-3mm	0.5-3mm
面纸尺寸 Paper Size (B=Length, A=Width)	最长尺寸B(Max.)	600mm	600mm
	最短尺寸B(Min.)	180mm	180mm
	最宽尺寸A(Max.)	455mm	455mm
	最窄尺寸A(Min.)	70mm	70mm
	面纸厚度Thickness	80-160gsm	80-160gsm
盒子尺寸 Finished Box Size (L=Length W=Width H=Height)	最长尺寸L(Max.)	400mm	400mm
	最短尺寸L(Min.)	60mm	60mm
	最宽尺寸W(Max.)	300mm	300mm
	最窄尺寸W(Min.)	50mm	50mm
	最高尺寸H(Max.)	110mm	110mm
折耳尺寸 Paper Corner Edge(E)	最低尺寸H(Min.)	15mm	15mm
	E	10-90mm	10-90mm
面纸折入深度 Folding in Depth(R)	R	10-80mm	10-80mm
面纸堆台最高 Paper Pile Height Max.		750mm	750mm
灰板堆台最高 Greyboard Pile Height Max.		850mm	850mm
胶桶容量 Glue Tank Volume		20L	20L
气源压力 Air Supply		460L/min,0.8MPa	460L/min,0.8MPa
生产速度 Speed		≤45pcs/min	≤45pcs/min
总功率 Total Power/电压Voltage		45kW/AC380V	45kW/AC380V
耗电量 Power Consumption		12kW/h	12kW/h
机器净重 Net Weight		5400kg	5400kg
一机器尺寸 Machine Dimension		7200x5400x3500mm	7200x5400x3500mm


- 1、标准型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件, 才能完成产品的制作)。
For standard type boxes, the following technical specifications must be met.

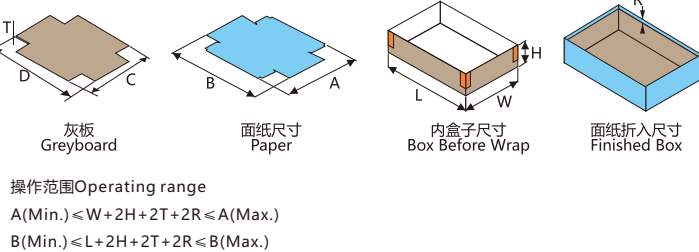


- 2、对接型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件, 才能完成产品的制作)。
For special boxes (paper corner edge = half of finished box width), the following technical specifications must be met.

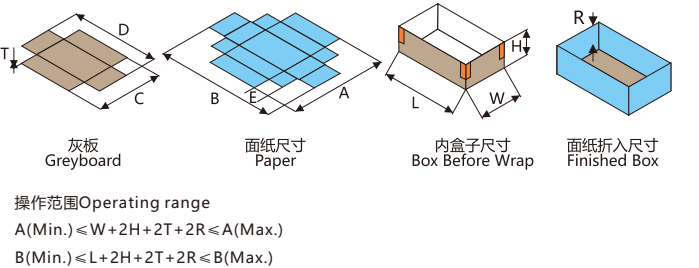


- 3、包深型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件.才能完成产品的制作)。
For deep wrapped boxes, the following technical specifications must be met.

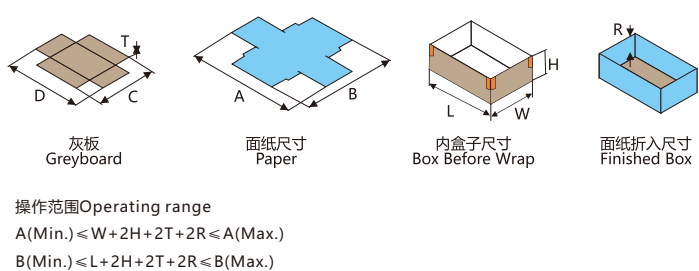

- 4、斜边型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件, 才能完成产品的制作)。
For slanting boxes, the following technical specifications must be met

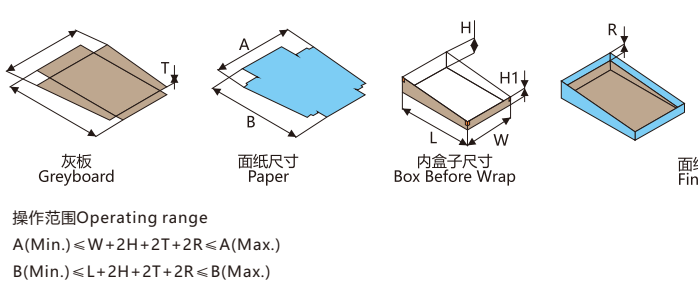

- 5、对角斜天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件, 才能完成产品的制作)。
For crosswise slanting boxes, the following technical specifications must be met

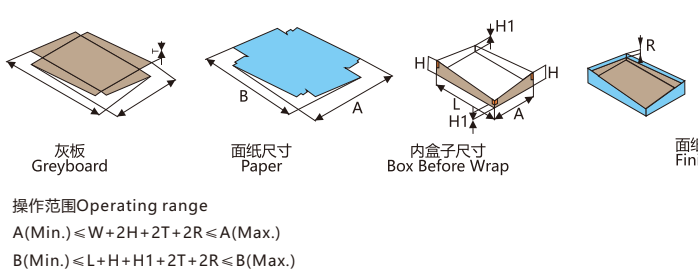

备注/Note:

1. 盒子大小由面纸大小决定; The Finished Box Max. sizes are determined by paper size.A(Min.)≤W+2H+2T+2R≤A(Max.); B(Min.)≤L+2H+2T+2R≤B(Max.)

2. 最大和最小尺寸不能同时满足; Either the Max. Sizes or the Min. Sizes can not be fulfilled on the same box.

3. 生产速度由盒子大小和面纸灰板的材质来决定; The production speed of the rigid box machine is determined by the box size, the paper and the greyboard materials.

4. 我司不提供空压机.空压机压力需求为8atm=0.808MPa.空压机功率7.5kW; Seller doesn't provide air compressor. (8atm=0.808MPa, 7.5kW compressor is needed)

5. 要求两个盒子长宽尺寸接近, 差值在8mm内; Two rigid boxes Sizes (length、width) require to be close, size difference within 8mm

6. 面纸包到底的斜边盒需要另配压泡机完成(从盒子内腔最低点开始(R1), 按斜边角度往高边画一条线, 斜边折入面纸有低于该线的部分即视为面纸包到底)(R2); Slanting boxes which coverpaper folding into the bottom, it need additional bubble pressing machine to finish (start from the lowest point of the inner boxes, draw a line to the high-side according to the slanting boxes angle, if the beveled folding coverpaper lower than this line then it called folding -into the bottom);

12 ※由于产品设计不断改良, 以上图片以及参数仅供参考。如有更改, 恕不另行通知。
Due to the continuous product improvement, the photos and parameters are for your reference only.

HM-DP4030P/HM-DP4030P-S



数字化精品盒生产线 >>> Digital Rigid box production line

功能说明 >>> Description

HM-DP4030P/HM-DP4030P-S是一款全自动双通道智能制盒机。适用于多种盒型的天盒和地盒的同时生产，如手机盒、首饰盒、化妆品盒、手表盒等等。做盒范围更大，更能满足现代包装市场的需求。整机外观经过全新设计，更加安全及美观。


本机采用伺服控制系统、图像定位系统，实现进纸、过胶、进灰板、贴四角、定位、抱盒、包边、折耳和折入成型自动完成。

在飞达、过胶和输送带使用知名品牌伺服驱动，可无极变速，高精度，易调节，省时间；定位部分采用图像定位系统及机器人抓取部件，提高定位精度及效率，误差范围可达±0.05MM，且定位及调试速度更快；成型机采用THK线性导轨和虚拟电子凸轮驱动，更稳定耐磨且动作更流畅，折入深度及折耳长度尺寸范围也更大。


HM-DP4030P/HM-DP4030P-S is a fully automatic dual-channel Rigid box making machine. It is suitable for the simultaneous production of Top boxes and bottom boxes of various box types, such as mobile phone boxes, jewelry boxes, cosmetic boxes, watch boxes, etc. The range of making boxes is larger, which can better meet the needs of the modern packaging market. The appearance of the whole machine has been newly designed, which is safer and more beautiful.

This machine adopts servo control system and image positioning system to realize automatic completion of paper feeding, gluing, gray board feeding, four corner pasting, positioning, box holding, edge wrapping, ear folding and folding forming.

Servo drives of well-known brands are used in the feeder, gluing and conveyor belts, which can be infinitely variable, high-precision, easy to adjust, and save time; the positioning part uses image positioning systems and robots to grab parts to improve positioning accuracy and efficiency, and the error range can reach ±0.05mm, and the positioning and debugging speed is faster; the forming machine adopts THK linear guide rail and virtual electronic cam drive, which is more stable and wear-resistant, and the movement is smoother, and the size range of folding depth and

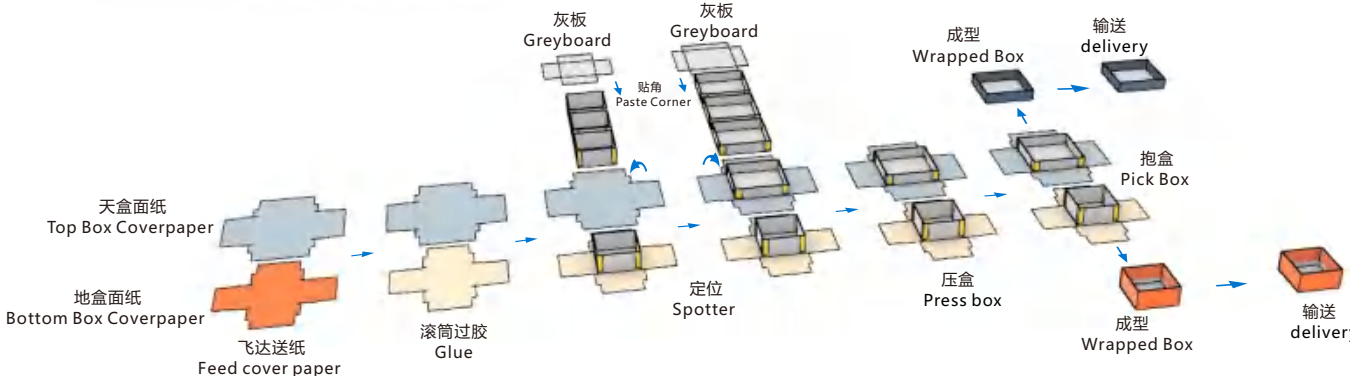

过胶部分
Glue part

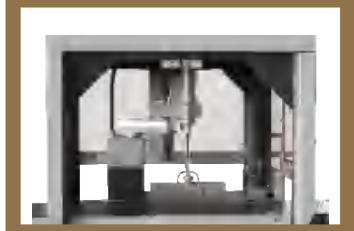

定位部分
Spotter part



贴角部分
Corner pasting part



成型部分
Wrapper part

14 ※由于产品设计不断改良，以上图片以及参数仅供参考。如有更改，恕不另行通知。
Due to the continuous product improvement, the photos and parameters are for your reference only.

HM-DP4030P/HM-DP4030P-S



数字化精品盒生产线 >>> Digital Rigid box production line

>机组特点和标准配置

- 1、适合各种硬纸天地盖自动生产线；
- 2、双工位成型，可同时完成天盒、地盒成型；
- 3、参数化智能调节；
- 4、长边、短边分层包边成型；
- 5、可同时输送天盒、地盒的面纸及灰纸板；
- 6、出盒方向平行于主输送带；
- 7、24小时胶水定时加热功能；
- 8、成型机内置300项产品配方；
- 9、四角贴角加热单独人机界面控制；（详见注释）
- 10、多功能机器人视觉影像定位系统(定位误差±0.05mm)；
- 11、纸盒自动抬盒引取装置；（详见注释）
- 12、全电脑功能参数的设置；


>Features and function:

1. Suitable for all kinds of rigid box automatic production line;
2. Double-station molding can complete the molding of the top box and bottom box at the same time;
3. Parametric intelligent adjustment;
4. The long side and short side are layered and formed;
5. Double-station feeding facial paper and gray cardboard function;
6. The box-out direction is parallel to the main conveyor belt;
7. 24-hour glue timing heating function;
8. The molding machine has built-in 300 product formulas;
9. The four-corner heating is controlled by a separate man-machine interface; (Details please check the note)
10. Multifunctional Robot Vision Image Positioning System (positioning error ±0.05mm);
11. Rigid box automatic lifting and extraction device; (Details please check the note)
12. Setting of all computer function parameters;
13. Auto error stop and display;

>主要技术参数/Technical parameters


型号 Model		HM-DP4030P	HM-DP4030P-S
灰板尺寸 Greyboard Size (D=Length, C=Width)	最长尺寸D(Max.)	660mm	660mm
	最短尺寸D(Min.)	80mm	80mm
	最宽尺寸C(Max.)	560mm	560mm
	最窄尺寸C(Min.)	70mm	70mm
	灰板厚度Thickness (T)	0.5-3mm	0.5-3mm
面纸尺寸 Paper Size (B=Length, A=Width)	最长尺寸B(Max.)	700mm	700mm
	最短尺寸B(Min.)	180mm	180mm
	最宽尺寸 (通道一)	600mm	600mm
	A(Max.) (通道二)	520mm	520mm
	最窄尺寸A(Min.)	70mm	70mm
	面纸厚度Thickness	80-160gsm	80-160gsm
	盒子尺寸 Finished Box Size (L=Length W=Width H=Height)		
	最长尺寸L(Max.)	500mm	500mm
	最短尺寸L(Min.)	60mm	60mm
	最宽尺寸W(Max.)	400mm	400mm
	最窄尺寸W(Min.)	50mm	50mm
	最高尺寸H(Max.)	130mm	130mm
	最低尺寸H(Min.)	12mm	12mm
折耳尺寸 Paper Corner Edge(E)	E	10-90mm	10-90mm
面纸折入深度 Folding in Depth(R)	R	10-80mm	10-80mm
面纸堆台最高 Paper Pile Height Max.		750mm	750mm
灰板堆台最高 Greyboard Pile Height Max.		850mm	850mm
胶桶容量 Glue Tank Volume		20L	20L
气源压力 Air Supply		460L/min,0.8MPa	460L/min,0.8MPa
生产速度 Speed		≤60pcs/min	≤60pcs/min
总功率 Total Power/电压Voltage		57kW/AC380V	63kW/AC380V
耗电量 Power Consumption		11.3kW/h	12.5kW/h
机器净重 Net Weight		6000kg	6000kg
机器尺寸 Machine Dimension		6800x6800x3500mm	6800x6800x3500mm

- 1、标准型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For standard type boxes, the following technical specifications must be met.

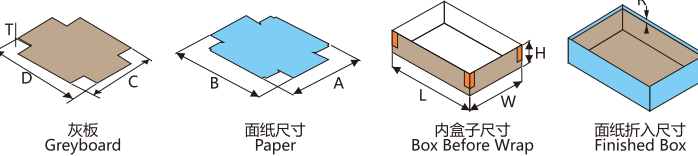


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 2、对接型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For special boxes (paper corner edge = half of finished box width), the following technical specifications must be met.

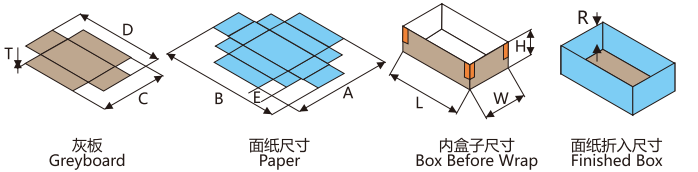


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 3、包深型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件,才能完成产品的制作)。
For deep wrapped boxes, the following technical specifications must be met.

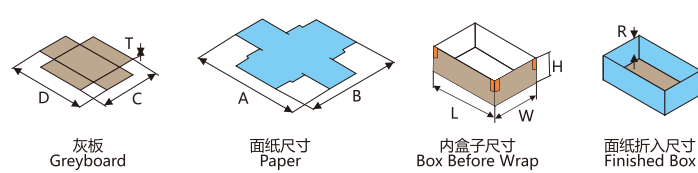


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 4、斜边型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For slanting boxes, the following technical specifications must be met

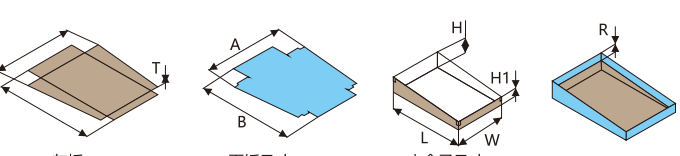

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 5、对角斜天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For crosswise slanting boxes, the following technical specifications must be met

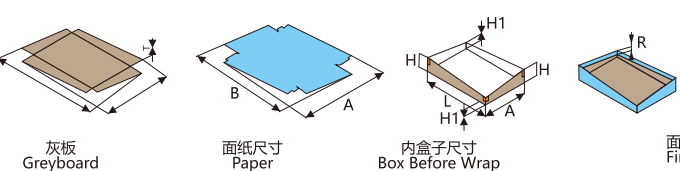

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + H + H1 + 2T + 2R \leq B(\text{Max.})$

备注/Note:

- 1、盒子大小由面纸大小决定；The Finished Box Max. sizes are determined by paper size. $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$; $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$
- 2、最大和最小尺寸不能同时满足；
Either the Max. Sizes or the Min. Sizes can not be fulfilled on the same box.
- 3、面纸包到底的斜边盒需要另配压泡机完成(从盒子内腔最低点开始(R1)，按斜边角度往高边画一条线，斜边折入面纸有低于该线的部分即视为面纸包到底)(R2)；
Slanting boxes which coverpaper folding into the bottom, it need additional bubble pressing machine to finish (start from the lowest point of the inner boxes, draw a line to the high-side according to the slanting boxes angle, if the beveled folding coverpaper lower than this line then it called folding-into the bottom) ;
- 4、生产速度由盒子大小和面纸灰板的材质来决定；
The production speed of the rigid box machine is determined by the box size, the paper and the greyboard materials.
- 5、我司不提供空压机,空压机压力需求为8atm=0.808MPa,空压机功率:7.5kW；
Seller doesn't provide air compressor. (8atm=0.808MPa, 7.5kW compressor is needed)

HM-DP4030M



全自动智能制盒机 >>> Automatic Rigid Box Machine

功能说明 >>> Description

HM-DP4030M 全自动智能制盒机，是一款针对常规尺寸精品盒，旨在突出高速生产的双通道全自动智能制盒机，可同时生产天盒和地盒，适用于多种天地盒型的大量生产，如手机盒、首饰盒、化妆品盒、手表盒、斜边盒等等。做盒范围更大，更能满足现代包装市场的需求。整机外观经过全新设计，更加安全及美观。

本机采用伺服控制系统、图像定位系统，实现进纸、过胶、进灰板、贴四角、定位、抱盒、包边、折耳和折入成型自动完成。

更在飞达、过胶和输送带使用伺服驱动，可无极变速，高精度，易调节，省时间；定位部分采用图像定位系统及机器人抓取部件，提高定位精度及效率，误差范围可达±0.05MM，且定位及调试速度更快；成型机采用THK线性导轨和电子凸轮驱动，更稳定耐磨且

HM-DP4030M Automatic rigid box machine is suitable to make various big size premium boxes, A dual-channel automatic rigid box machine designed to highlight high-speed production., such as mobile phone boxes, jewelry boxes, cosmetic boxes, watch boxes, etc. Size range is bigger, more suitable for current packaging market. Machine' appearance is new design which is safer and more beautiful.

This machine adopts servo control system and image positioning system to realize automatic completion of paper feeding, gluing, gray board feeding, four corner pasting, positioning, box holding, edge wrapping, ear folding and folding forming.

Servo drives of well-known brands are used in the feeder, gluing and conveyor belts, which can be infinitely variable, high-precision, easy to adjust, and save time; the positioning part uses image positioning systems and robots to grab parts to improve positioning accuracy and efficiency, and the error range can reach ±0.05mm, and the positioning and debugging speed is faster; the forming machine adopts THK linear guide rail and virtual electronic cam drive, which is more stable and wear-resistant, and the movement is smoother, and the size range of folding depth and folding ear length is also larger.



过胶部分
Glue part




定位部分
Spotter part



贴角部分
Corner pasting part



成型部分
Wrapper part

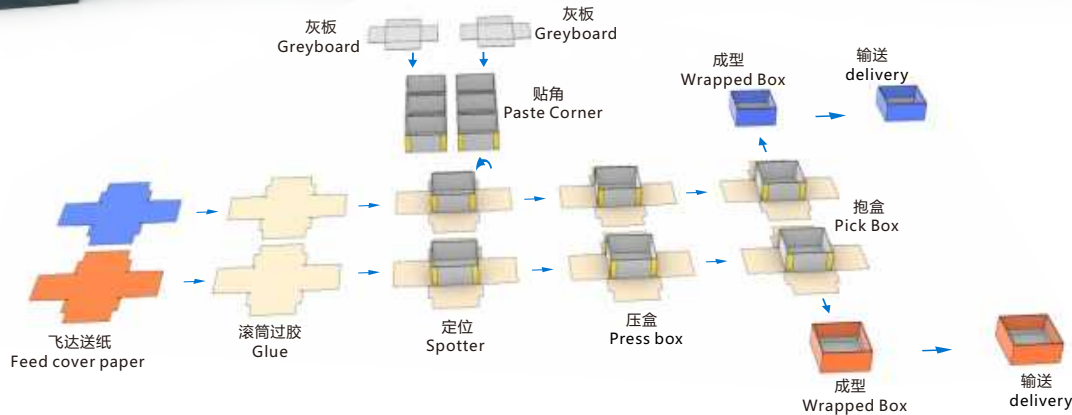

HM-DP4030M



全自动智能制盒机 >>> Automatic Rigid Box Machine

>机组特点和标准配置

- 1. 适合各种硬纸天地盖的自动生产;
- 2. 全电脑功能参数的设置;
- 3. 故障诊断功能;
- 4. 自动吸送面纸和送灰板功能;
- 5. 24 小时控制胶水预热功能;
- 6. 内置300项产品配方;
- 7. 整机采用伺服控制系统;
- 8. 图像定位系统及机器人抓取(定位精度±0.05mm);
- 9. 纸盒自动抬盒引取装置;


>Features and function:

- 1. Suitable for all kinds of rigid box automatic production line;
- 2. Setting of all computer function parameters;
- 3. Auto error stop and display;
- 4. Automatically feed paper and greyboard;
- 5. 24-hour glue timing heating function;
- 6. Wrapper can input 300 product formulas;
- 7. Servo system for controlling the whole machine;
- 8. Spotter by camera tracing system and SCARA (Selective Compliance Assembly Robot Arm)(positioning accuracy±0.05mm);
- 9. wrapper can automatic lift amd wrap box;

>主要技术参数/Technical parameters


型号 Model		HM-DP4030M
灰板尺寸 Greyboard Size (D=Length, C=Width)	最长尺寸D(Max.)	510mm
	最短尺寸D(Min.)	90mm
	最宽尺寸C(Max.)	410mm
	最窄尺寸C(Min.)	90mm
	灰板厚度Thickness (T)	0.5-3mm
面纸尺寸 Paper Size (B=Length, A=Width)	最长尺寸B(Max.)	600mm
	最短尺寸B(Min.)	180mm
	最宽尺寸A(Max.)	435mm
	最窄尺寸A(Min.)	70mm
	面纸厚度Thickness	80-160gsm
盒子尺寸 Finished Box Size (L=Length W=Width H=Height)	最长尺寸L(Max.)	400mm
	最短尺寸L(Min.)	60mm
	最宽尺寸W(Max.)	300mm
	最窄尺寸W(Min.)	60mm
	最高尺寸H(Max.)	110mm
折耳尺寸 Paper Corner Edge(E)	最低尺寸H(Min.)	15mm
	E	10-90mm
面纸折入深度 Folding in Depth®	R	10-80mm
面纸堆台最高 Paper Pile Height Max.		
胶桶容量 Glue Tank Volume		600mm
气源压力 Air Supply		20L
生产速度 Speed		460L/min,0.8MPa
总功率 Total Power/电压Voltage		≤45pcs/min
耗电量 Power Consumption		44kW/AC380V
机器净重 Net Weight		12kW/h
机器尺寸 Machine-Dimension		5400kg
		6000x7800x3500mm

- 1、标准型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For standard type boxes, the following technical specifications must be met.

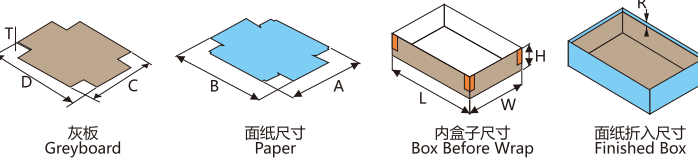


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 2、对接型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For special boxes (paper corner edge = half of finished box width), the following technical specifications must be met.

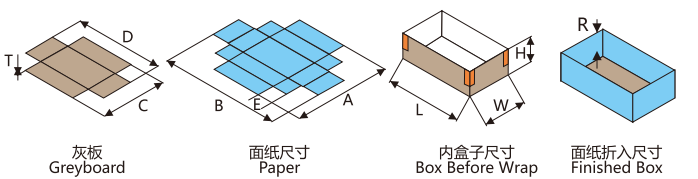


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 3、包深型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件,才能完成产品的制作)。
For deep wrapped boxes, the following technical specifications must be met.

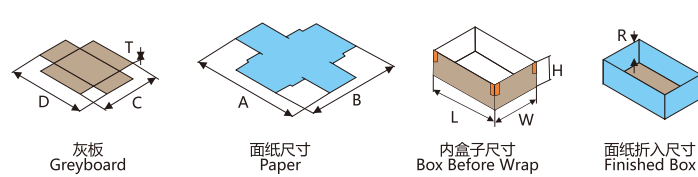


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 4、斜边型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For slanting boxes, the following technical specifications must be met

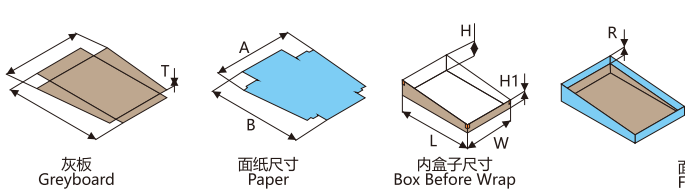

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 5、对角斜边天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For crosswise slanting boxes, the following technical specifications must be met

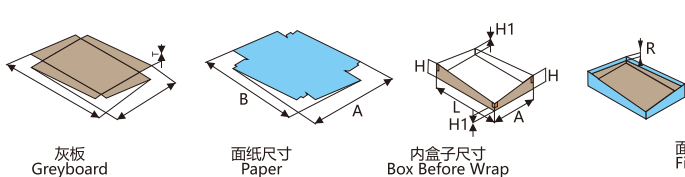

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + H + H1 + 2T + 2R \leq B(\text{Max.})$

备注/Note:

- 1. 盒子大小由面纸大小决定；The Finished Box Max. sizes are determined by paper size. $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$; $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$
- 2. 最大和最小尺寸不能同时满足；
Either the Max. Sizes or the Min. Sizes can not be fulfilled on the same box.
- 3. 面纸包到底的斜边盒需要另配压泡机完成(从盒子内腔最低点开始(R1)，按斜边角度往高边画一条线，斜边折入面纸有低于该线的部分即视为面纸包到底)(R2)；
Slanting boxes which coverpaper folding into the bottom, it need additional bubble pressing machine to finish (start from the lowest point of the inner boxes, draw a line to the high-side according to the slanting boxes angle, if the beveled folding coverpaper lower than this line then it called folding-into the bottom)；
- 4. 生产速度由盒子大小和面纸灰板的材质来决定；
The production speed of the rigid box machine is determined by the box size, the paper and the greyboard materials.
- 5. 我司不提供空压机,空压机压力需求为8atm=0.808MPa,空压机功率:7.5kW；
Seller doesn't provide air compressor. (8atm=0.808MPa, 7.5kW compressor is needed)

HM-DP4030M-A



全自动智能制盒机 >>> Automatic Rigid Box Machine

功能说明 >>> Description

HM-DP4030M-A 全自动智能制盒机，是一款针对常规尺寸精品盒，旨在突出高速生产的双通道全自动智能制盒机，适用于多种天地盒型的大量生产，如手机盒、首饰盒、化妆品盒、手表盒、斜边盒等等。做盒范围更大，更能满足现代包装市场的需求。整机外观经过全新设计，更加安全及美观。

本机采用伺服控制系统、图像定位系统，实现进纸、过胶、进灰板、贴四角、定位、抱盒、包边、折耳和折入成型自动完成。

更在飞达、过胶和输送带使用伺服驱动，可无极变速，高精度，易调节，省时间；定位部分采用图像定位系统及机器人抓取部件，提高定位精度及效率，误差范围可达±0.05MM，且定位及调试速度更快；成型机采用THK线性导轨和电子凸轮驱动，更稳定耐磨且动作更流畅，折入深度及折耳长度尺寸范围也更大。


HM-DP4030M-A Automatic rigid box machine is suitable to make various big size premium boxes, A dual-channel automatic rigid box machine designed to highlight high-speed production., such as mobile phone boxes, jewelry boxes, cosmetic boxes, watch boxes, etc. Size range is bigger, more suitable for current packaging market. Machine' appearance is new design which is safer and more beautiful.

This machine adopts servo control system and image positioning system to realize automatic completion of paper feeding, gluing, gray board feeding, four corner pasting, positioning, box holding, edge wrapping, ear folding and folding forming.

Servo drives of well-known brands are used in the feeder, gluing and conveyor belts, which can be infinitely variable, high-precision, easy to adjust, and save time; the positioning part uses image positioning systems and robots to grab parts to improve positioning accuracy and efficiency, and the error range can reach ±0.05mm, and the positioning and debugging speed is faster; the forming machine adopts THK linear guide rail and virtual electronic cam drive, which is more stable and wear-resistant, and the movement is smoother, and the size range of folding depth and folding ear length is also larger.



过胶部分
Glue part

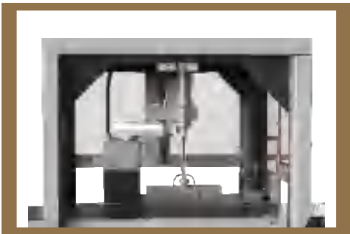


定位部分
Spotter part



贴角部分
Corner pasting part



成型部分
Wrapper part

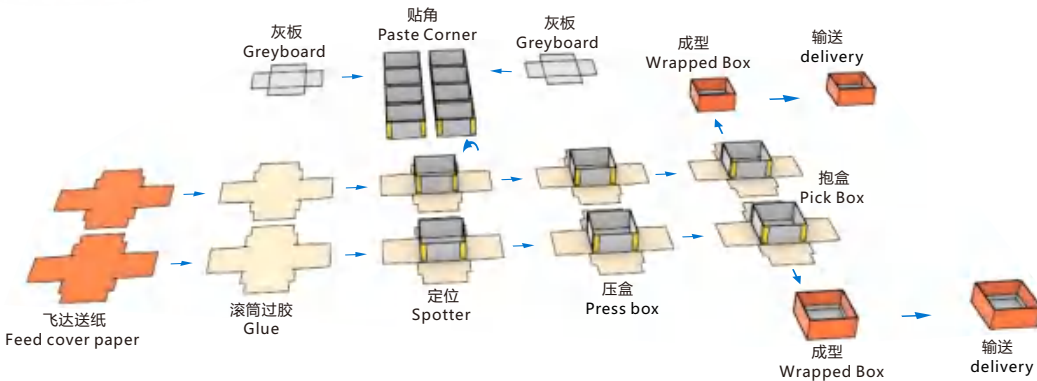

HM-DP4030M-A



全自动智能制盒机 >>> Automatic Rigid Box Machine

>机组特点和标准配置

- 1. 适合各种硬纸天地盖的自动生产;
- 2. 全电脑功能参数的设置;
- 3. 故障诊断功能;
- 4. 自动吸送面纸和送灰板功能;
- 5. 24 小时控制胶水预热功能;
- 6. 内置300项产品配方;
- 7. 整机采用伺服控制系统;
- 8. 图像定位系统及机器人抓取(定位精度±0.05mm);
- 9. 纸盒自动抬盒引取装置;


>Features and function:

- 1. Suitable for all kinds of rigid box automatic production line;
- 2. Setting of all computer function parameters;
- 3. Auto error stop and display;
- 4. Automatically feed paper and greyboard;
- 5. 24-hour glue timing heating function;
- 6. Wrapper can input 300 product formulas;
- 7. Servo system for controlling the whole machine;
- 8. Spotter by camera tracing system and SCARA (Selective Compliance Assembly Robot Arm)(positioning accuracy±0.05mm);
- 9. wrapper can automatic lift amd wrap box;

>主要技术参数/Technical parameters


型号 Model	HM-DP4030M-A	
灰板尺寸 Greyboard Size (D=Length, C=Width)	最长尺寸D(Max.)	510mm
	最短尺寸D(Min.)	80mm
	最宽尺寸C(Max.)	410mm
	最窄尺寸C(Min.)	70mm
	灰板厚度Thickness (T)	0.5-3mm
面纸尺寸 Paper Size (B=Length, A=Width)	最长尺寸B(Max.)	600mm
	最短尺寸B(Min.)	180mm
	最宽尺寸A(Max.)	435mm
	最窄尺寸A(Min.)	70mm
	面纸厚度Thickness	80-160gsm
盒子尺寸 Finished Box Size (L=Length W=Width H=Height)	最长尺寸L(Max.)	350mm
	最短尺寸L(Min.)	60mm
	最宽尺寸W(Max.)	250mm
	最窄尺寸W(Min.)	60mm
	最高尺寸H(Max.)	110mm
折耳尺寸 Paper Corner Edge(E)	最低尺寸H(Min.)	15mm
	E	10-90mm
面纸折入深度 Folding in Depth®	R	10-80mm
面纸堆台最高 Paper Pile Height Max.		
胶桶容量 Glue Tank Volume		600mm
气源压力 Air Supply		20L
生产速度 Speed		460L/min,0.8MPa
总功率 Total Power/电压Voltage		≤45pcs/min
耗电量 Power Consumption		44kW/AC380V
机器净重 Net Weight		12kW/h
机器尺寸 Machine-Dimension		5400kg
		6000x7800x3500mm

- 1、标准型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For standard type boxes, the following technical specifications must be met.

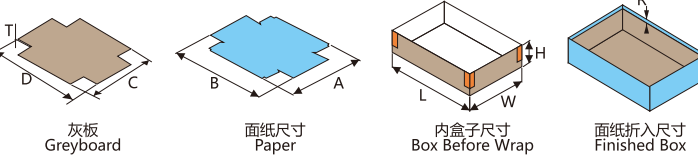


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 2、对接型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For special boxes (paper corner edge = half of finished box width), the following technical specifications must be met.

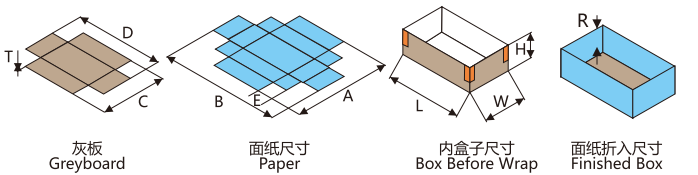


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 3、包深型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件,才能完成产品的制作)。
For deep wrapped boxes, the following technical specifications must be met.

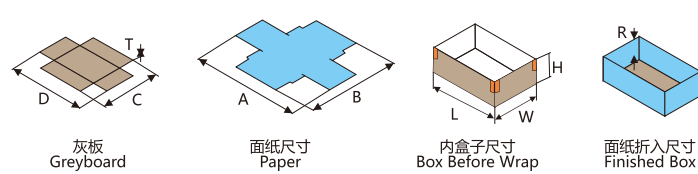


操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 4、斜边型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For slanting boxes, the following technical specifications must be met

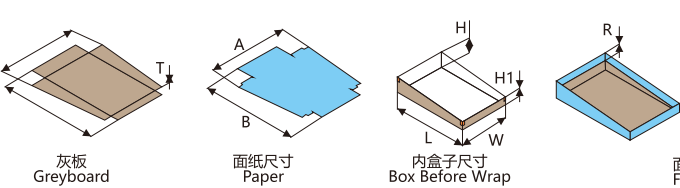

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 5、对角斜边天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For crosswise slanting boxes, the following technical specifications must be met

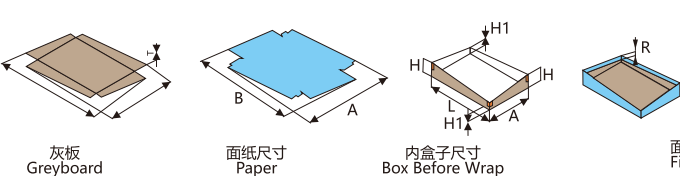

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + H + H1 + 2T + 2R \leq B(\text{Max.})$

备注/Note:

- 1. 盒子大小由面纸大小决定；The Finished Box Max. sizes are determined by paper size. $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$; $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$
- 2. 最大和最小尺寸不能同时满足；
Either the Max. Sizes or the Min. Sizes can not be fulfilled on the same box.
- 3. 面纸包到底的斜边盒需要另配压泡机完成(从盒子内腔最低点开始(R1)，按斜边角度往高边画一条线，斜边折入面纸有低于该线的部分即视为面纸包到底)(R2)；
Slanting boxes which coverpaper folding into the bottom, it need additional bubble pressing machine to finish (start from the lowest point of the inner boxes, draw a line to the high-side according to the slanting boxes angle, if the beveled folding coverpaper lower than this line then it called folding-into the bottom)；
- 4. 生产速度由盒子大小和面纸灰板的材质来决定；
The production speed of the rigid box machine is determined by the box size, the paper and the greyboard materials.
- 5. 我司不提供空压机,空压机压力需求为8atm=0.808MPa,空压机功率:7.5kW；
Seller doesn't provide air compressor. (8atm=0.808MPa, 7.5kW compressor is needed)

HM-DP6545D/HM-DP6545C



全自动智能制盒机 >>> Automatic Rigid Box Machine

功能说明 >>> Description

HM-DP6545D 是一款针对大尺寸精品盒，旨在突出高速生产的双工位全自动智能制盒机。适用于多种盒型的大量生产，如手机盒、首饰盒、化妆品盒、手表盒等等。做盒范围更大，更能满足现代包装市场的需求。整机外观经过全新设计，更加安全及美观。

本机采用伺服控制系统、图像定位系统，实现进纸、过胶、进灰板、贴四角、定位、抱盒、包边、折耳和折入成型自动完成。

在飞达、过胶和输送带使用知名品牌伺服驱动，可无级变速，高精度，易调节，省时间；贴角部分，可按需分段分次贴不同长度的胶带；定位部分采用图像定位系统及机器人抓取部件，提高定位精度及效率，误差范围可达±0.05mm,且定位及调试速度更快；成型机采用THK线性导轨及虚拟电子凸轮驱动，更稳定耐磨且动作更流畅，折入深度及折耳长度尺寸范围也更大。


HM-DP6545D Automatic Rigid Box Machine with Double wrapper, which designed for big-size premium boxes. It is suitable to make various types of boxes for mass production, such as mobile phone boxes, gift boxes, cosmetic boxes, watch boxes, etc. Size range is more bigger, more suitable for current packaging market. Machine's appearance is new design which is safer and more beautiful.

HM-DP6545D adopts PLC and man-machine control, camera tracing system, and can automatically feed cover paper, feed greyboard, paste four corners, spot greyboard, lift box, wrap box, fold corner edges and form box.

The feeder, the gluer and the conveyor are driven by well known servos which have continuously variable transmission, and enjoys high accuracy, easy adjusting, and high efficiency. The corner unit can be attached to the tape of different lengths according to the need; The spotting unit adopts camera tracing system and robot arm to pick and spot the greyboard, enhancing the spotter accuracy to $\pm 0.05\text{mm}$, and its spotting and adjusting is more faster. The forming unit employs Japan THK linear slider and virtual electronic cam driving system, guaranteeing the stable quality and fluent movement and enlarge the folding-in depth and corner edges.



过胶部分
Glue part

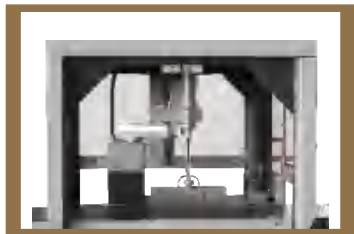


定位部分
Spotter part



贴角部分
Corner pasting part



成型部分
Wrapper part

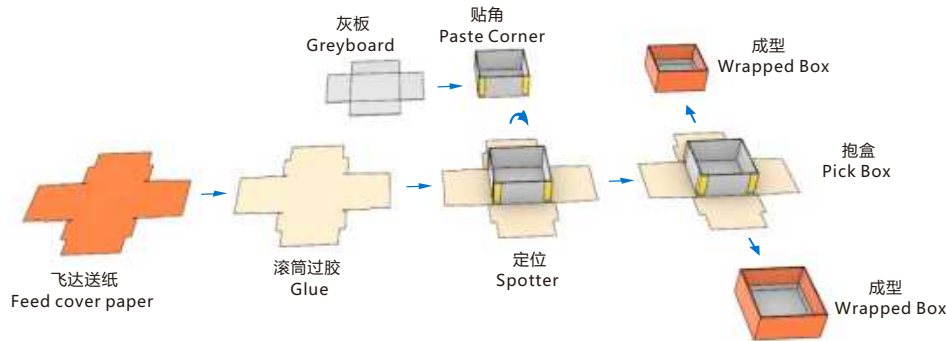

HM-DP6545D/HM-DP6545C



全自动智能制盒机 >>> Automatic Rigid Box Machine

>机组特点和标准配置

1. 适合各种硬纸天地盖自动生产线;

2. 双工位成型; (详见注释)

3. 参数化智能调节;

4. 长边、短边分层包边成型; (D)

5. 长边、短边同层包边成型; (C)

6. 成型可单边独立工作;

7. 凸轮箱可整体参与运动控制; (详见注释)

8. 出盒方向平行于主输送带;

9. 全电脑功能参数的设置;

10. 故障诊断功能;
11. 自动吸送面纸和送灰纸板功能;

12. 24小时胶水定时加热功能;

13. 成型机内置300项产品配方;

14. 四角贴角加热单独人机界面控制; (详见注释)

15. 多功能机器人视觉影像定位系统(定位误差±0.05mm); (详见注释)

16. 纸盒自动抬盒引取装置; (详见注释)

17. 胶水粘度自动控制系统(选配); (详见注释)

18. 伺服底模; (详见注释)

19. 拉模部件与主滑块同步; (详见注释)

>Features and function:

1. Suit to all kinds of rigid boxes in mass production;

2. Double-station forming; (Details please check the note)

3. Parametric intelligent adjustment;

4. The long side and short side are layered and formed; (D)

5. Long and short sides are wrapped in the same layer; (C)

6. Forming can work independently on one side;

7. The cam box can participate in motion control as a whole; (Details please check the note)

8. The box-out direction is parallel to the main conveyor belt;

9. Parameter adopts computer digital setting;

10. Auto error stop and display;

11. Automatically feed paper and greyboard;

12. 24-hour glue timing heating function;

13. Wrapper can input 300 product formulas;

14. Corner pasting part with independent man-machine control and heating system; (Details please check the note)

15. Multifunctional Robot Vision Image Positioning System (spotting inaccuracy ±0.05mm); (Details please check the note)

16. Wrapper can automatic lift and wrap box; (Details please check the note)

17. Automatic control system for glue viscosity (optional); (Details please check the note)


18. Bottom mould use Piston type; (Details please check the note)

19. Main Slider and pull mold section synchronized; (Details please check the note)

>主要技术参数/Technical parameters


型号 Model		HM-DP6545D	HM-DP6545C
灰板尺寸 Greyboard Size (D=Length, C=Width)	最长尺寸D(Max.)	820mm	820mm
	最短尺寸D(Min.)	124mm	124mm
	最宽尺寸C(Max.)	680mm	680mm
	最窄尺寸C(Min.)	92mm	92mm
	灰板厚度Thickness (T)	1-3mm	1-3mm
面纸尺寸 Paper Size (B=Length, A=Width)	最长尺寸B(Max.)	950mm	950mm
	最短尺寸B(Min.)	180mm	180mm
	最宽尺寸A(Max.)	710mm	710mm
	最窄尺寸A(Min.)	95mm	95mm
	面纸厚度Thickness	80-160gsm	80-160gsm
盒子尺寸 Finished Box Size (L=Length W=Width H=Height)	最长尺寸L(Max.)	650mm	650mm
	最短尺寸L(Min.)	100mm	100mm
	最宽尺寸W(Max.)	450mm	450mm
	最窄尺寸W(Min.)	50mm	50mm
	最高尺寸H(Max.)	150mm	210mm
折耳尺寸 Paper Corner Edge(E)	最低尺寸H(Min.)	12mm	12mm
	E	10-125mm	10-125mm
面纸折入深度 Folding in Depth(R)	R	15-100mm	15-100mm
面纸堆台最高 Paper Pile Height Max.			
灰板堆台最高 Greyboard Pile Height Max.		750mm	750mm
胶桶容量 Glue Tank Volume		850mm	850mm
气源压力 Air Supply		40L	40L
		460L/min,0.8MPa	460L/min,0.8MPa
生产速度 Speed		≤45pcs/min	≤45pcs/min
总功率 Total Power/电压Voltage		45kW/AC380V	45kW/AC380V
耗电量 Power Consumption		11.25kW/h	11.25kW/h
机器净重 Net Weight		7700kg	7700kg
—机器尺寸 Machine Dimension		6800x5500x3800mm	6800x5500x3800mm

- 1、标准型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件, 才能完成产品的制作)。
For standard type boxes, the following technical specifications must be met.

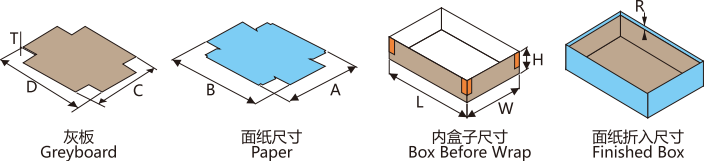

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 2、对接型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件, 才能完成产品的制作)。
For special boxes (paper corner edge = half of finished box width), the following technical specifications must be met.

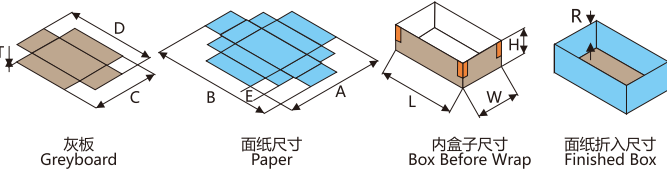

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

备注/Note:


- 1、盒子大小由面纸大小决定; The Finished Box Max. sizes are determined by paper size.
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$; $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

2、最大和最小尺寸不能同时满足; Either the Max. Sizes or the Min. Sizes can not be fulfilled on the same box.

3、生产速度由盒子大小和面纸灰板的材质来决定;
The production speed of the rigid box machine is determined by the box size, the paper and the greyboard materials.


4、我司不提供空压机,空压机压力需求为8atm=0.808MPa,空压机功率:7.5kW。
Seller doesn't provide air compressor. (8atm=0.808MPa, 7.5kW compressor is needed).

- 3、包深型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件,才能完成产品的制作)。
For deep wrapped boxes, the following technical specifications must be met.

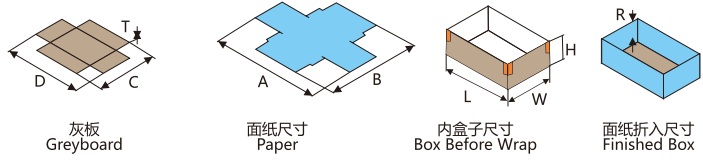

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 4、对搭折耳型天地盖面纸及灰板的尺寸范围 (在技术参数上必须满足以下条件才能完成产品的制作)。
For special boxes (paper corner edge = finished box width), the following technical specifications must be met.



操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

HM-DP6545A/HM-DP6545B



数字化精品盒生产线 >>> Digital Rigid box production line

功能说明 >>> Description

HM-DP6545A 是一款针对大尺寸精品盒，旨在突出快速换模的全自动智能制盒机。适用于多种盒型的大量生产，如手机盒、首饰盒、化妆品盒、手表盒等等。做盒范围更大，更能满足现代包装市场的需求。整机外观经过全新设计，更加安全及美观。

本机采用伺服控制系统、图像定位系统，实现进纸、过胶、进灰板、贴四角、定位、抱盒、包边、折耳和折入成型自动完成。

在飞达、过胶和输送带使用知名品牌伺服驱动，可无极变速，高精度，易调节，省时间；定位部分采用图像定位系统及机器人抓取部件，提高定位精度及效率，误差范围可达±0.05mm，且定位及调试速度更快；成型机采用THK线性导轨及虚拟电子凸轮驱动，更稳定耐磨且动作更流畅，折入深度及折耳长度尺寸范围也更大。


HM-DP6545A Automatic Rigid Box Machine which designed for digital setting, It is suitable to make various types of boxes for mass production, such as mobile phone boxes, gift boxes, cosmetic boxes, watch boxes, etc. Size range is more bigger, more suitable for current packaging market. Machine's appearance is new design which is safer and more beautiful.

HM-DP6545A adopts PLC and man-machine control, camera tracing system, and can automatically feed cover paper, feed greyboard, paste four corners, spot greyboard, lift box, wrap box, fold corner edges and form box.

The feeder, the gluer and the conveyer are driven by well known servos which have continuously variable transmission, and enjoys high accuracy, easy adjusting, and efficienay. The spotting unit adopts camera tracing system and robot arm to pick and spot the greyboard ,enhancing the spotter accuracy to ± 0.05mm, and its spotting and adjusting is more faster. The forming unit employs Japan THK linear slider and virtual electronic cam driving system, guaranteeing the stable quality and fluent movement and enlarge the folding-in depth and corner edges.



过胶部分
Glue part

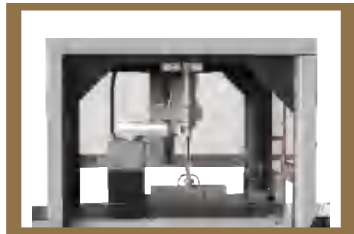


定位部分
Spotter part



贴角部分
Corner pasting part



成型部分
Wrapper part

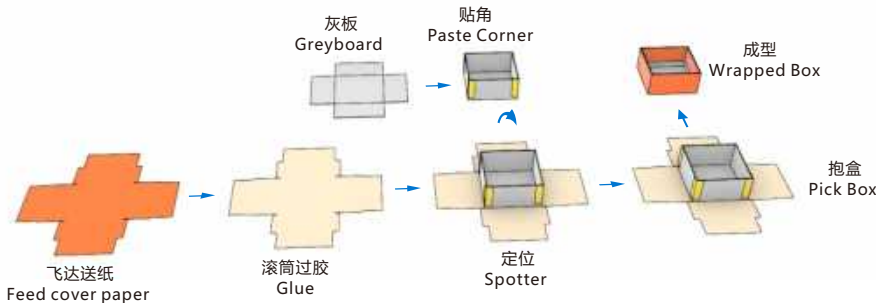

HM-DP6545A/HM-DP6545B



数字化精品盒生产线 >>> Digital Rigid box production line

>机组特点和标准配置

1. 适合各种硬纸天地盖自动生产线;

2. 单工位成型;

3. 参数化智能调节;

4. 长边、短边分层包边成型; (A)

5. 长边、短边同层包边成型; (B)

6. 凸轮箱可整体参与运动控制; (详见注释)

7. 出盒方向平行于主输送带;

8. 全电脑功能参数的设置;

9. 故障诊断功能;
10. 自动吸送面纸和送灰纸板功能;

11. 24小时胶水定时加热功能;

12. 成型机内置300项产品配方;

13. 四角贴角加热单独人机界面控制; (详见注释)

14. 多功能机器人视觉影像定位系统(定位误差±0.05mm); (详见注释)

15. 纸盒自动抬盒引取装置; (详见注释)

16. 胶水粘度自动控制系统(选配); (详见注释)

17. 伺服底模; (详见注释)

18. 拉模部件与主滑块同步; (详见注释)

>Features and function:

1. Suit to all kinds of rigid boxes in mass production;

2. Single Wrapper;

3. Parametric intelligent adjustment;

4. The long side and short side are layered and formed; (A)

5. Long and short sides are wrapped in the same layer; (B)

6. The cam box can participate in motion control as a whole; (Details please check the note)

7. The box-out direction is parallel to the main conveyor belt;

8. Parameter adopts computer digital setting;

9. Auto error stop and display;

10. Automatically feed paper and greyboard;

11. 24-hour glue timing heating function;

12. Wrapper can input 300 product formulas;

13. Corner pasting part with independent man-machine control and heating system; (Details please check the note)

14. Multifunctional Robot Vision Image Positioning System (spotting inaccuracy ±0.05mm); (Details please check the note)

15. Wrapper can automatic lift and wrap box; (Details please check the note)

16. Automatic control system for glue viscosity (optional); (Details please check the note)


17. Bottom mould use Piston type; (Details please check the note)

18. Main Slider and pull mold section synchronized; (Details please check the note)

>主要技术参数/Technical parameters


型号 Model		HM-DP6545A	HM-DP6545B
灰板尺寸 Greyboard Size (D=Length, C=Width)	最长尺寸D(Max.)	820mm	820mm
	最短尺寸D(Min.)	124mm	124mm
	最宽尺寸C(Max.)	680mm	680mm
	最窄尺寸C(Min.)	92mm	92mm
	灰板厚度Thickness (T)	1-3mm	1-3mm
面纸尺寸 Paper Size (B=Length, A=Width)	最长尺寸B(Max.)	950mm	950mm
	最短尺寸B(Min.)	180mm	180mm
	最宽尺寸A(Max.)	710mm	710mm
	最窄尺寸A(Min.)	95mm	95mm
	面纸厚度Thickness	80-160gsm	80-160gsm
盒子尺寸 Finished Box Size (L=Length W=Width H=Height)	最长尺寸L(Max.)	650mm	650mm
	最短尺寸L(Min.)	100mm	100mm
	最宽尺寸W(Max.)	450mm	450mm
	最窄尺寸W(Min.)	50mm	50mm
	最高尺寸H(Max.)	150mm	210mm
折耳尺寸 Paper Corner Edge(E)	最低尺寸H(Min.)	12mm	12mm
	E	10-125mm	10-125mm
面纸折入深度 Folding in Depth(R)	R	15-100mm	15-100mm
面纸堆台最高 Paper Pile Height Max.		750mm	750mm
灰板堆台最高 Greyboard Pile Height Max.		850mm	850mm
胶桶容量 Glue Tank Volume		40L	40L
气源压力 Air Supply		460L/min,0.8MPa	460L/min,0.8MPa
生产速度 Speed		≤33pcs/min	≤33pcs/min
总功率 Total Power/电压Voltage		35kW/AC380V	35kW/AC380V
耗电量 Power Consumption		8.75kW/h	8.75kW/h
机器净重 Net Weight		6800kg	6800kg
机器尺寸 Machine Dimension		6800x4500x3800mm	6800x4500x3800mm

- 1、标准型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For standard type boxes, the following technical specifications must be met.

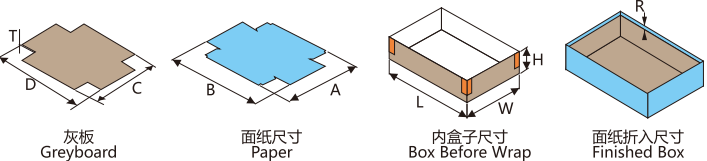

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 2、对接型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件，才能完成产品的制作)。
For special boxes (paper corner edge = half of finished box width), the following technical specifications must be met.

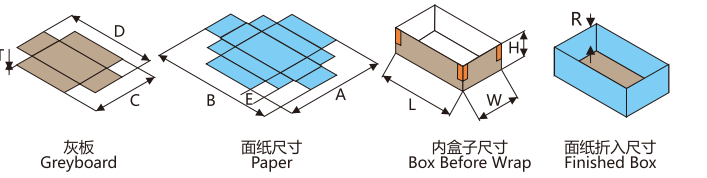

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

备注/Note:


1. 盒子大小由面纸大小决定; The Finished Box Max. sizes are determined by paper size. $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$; $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

2. 最大和最小尺寸不能同时满足;
Either the Max. Sizes or the Min. Sizes can not be fulfilled on the same box.

3. 生产速度由盒子大小和面纸灰板的材质来决定;
The production speed of the rigid box machine is determined by the box size, the paper and the greyboard materials.


4. 我司不提供空压机.空压机压力需求为8atm=0.808MPa,空压机功率:7.5kW;
Seller doesn't provide air compressor.
(8atm=0.808MPa, 7.5kW compressor is needed)

- 3、包深型天地盖面纸及灰板的尺寸范围(在技术参数上必须满足以下条件,才能完成产品的制作)。
For deep wrapped boxes, the following technical specifications must be met.

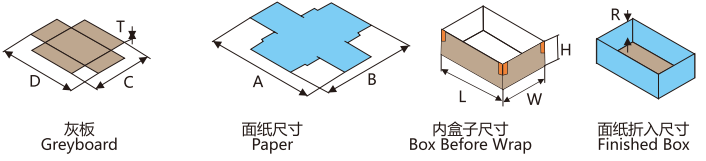

操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

- 4、对搭折耳型天地盖面纸及灰板的尺寸范围（在技术参数上必须满足以下条件才能完成产品的制作）。
For special boxes (paper corner edge = finished box width), the following technical specifications must be met.



操作范围Operating range
 $A(\text{Min.}) \leq W + 2H + 2T + 2R \leq A(\text{Max.})$
 $B(\text{Min.}) \leq L + 2H + 2T + 2R \leq B(\text{Max.})$

32 ※由于产品设计不断改良，以上图片以及参数仅供参考。如有更改，恕不另行通知。
Due to the continuous product improvement, the photos and parameters are for your reference only.

- 1、**伺服底模**：底模自动跟随主滑块相位运动，可实现多款异形盒生产及附加功能开发。
- 2、**拉模部件与主滑块同步**：成型折边伺服与主滑块同步，可实现部分附加功能，用隐藏模时可做退盒使用，避免退盒顶针痕迹。
- 3、**四角贴角加热人机界面控制**：贴角加热采用四通道微电脑温控模块分四路独立控制，可通过人机界面独立调整各路温度，以达精准温控，确保胶带预涂胶溶解均匀，增加粘贴牢固度。
- 4、**图像定位系统及机器人抓取**：多功能机器人及视觉图像处理定位系统，多模式视觉抓图方式，确保异形盒适用及功能拓展，增加多模式多形状面纸定位精度。
- 5、**成型部分自动抬盒引取装置**：采用拟人动作，在产品位移过程中将产品抱起离开输送带，保证位移过程中产品面纸不被划伤，增加产品良品率，适应高要求产品。
- 6、**胶水粘度自动控制系统**：根据胶水特性预定的粘度，可自动控制胶水的粘度、温度，确保胶水在使用过程中有持续稳定的特性。
- 7、**自动换模功能**：通过人机界面新建或调取预存产品配方，一键切换通过伺服传动快速精准调整位置，减少产品切换时间。
- 8、**双工位成型**：通过运动控制模块与伺服的高效配合，增加了一组成型工位，减少成型等待时间，提高过胶、定位、贴角同等条件下成品产出效率，达到稳定高速产出，提高单位时间产量，有效节能降低成本。
- 9、**凸轮箱可整体参与运动控制**：四组包边凸轮箱可根据产品特性分别独立参与包边运作，拓展异型盒功能开发。

1. **Servo bottom mold**: the bottom mold automatically follows the phase movement of the main slider, which can realize the production of various special-shaped boxes and the development of additional functions.
2. **The drawing die parts are synchronized with the main slider**: the forming folding servo is synchronized with the main slider, which can realize some additional functions. When using a hidden mold, it can be used as a box return to avoid the needle marks.
3. **Four-corner corner heating man-machine interface control**: four-channel microcomputer temperature control module is used for four-way independent control of the corner heating, and the temperature of each channel can be independently adjusted through the man-machine interface to achieve precise temperature control and ensure that the pre-coated glue of the tape is dissolved evenly, increase the firmness of the paste.
4. **Image positioning system and robot capture**: multi-functional robot and visual image processing positioning system, multi-mode visual capture method, to ensure the application and function expansion of special-shaped boxes, and increase the positioning accuracy of multi-mode and multi-shape paper.
5. **The forming part is equipped with an automatic box-lifting and pulling device**: anthropomorphic actions are used to lift the product away from the conveyor belt during the product displacement process, so as to ensure that the product paper is not scratched during the displacement process, increase the product yield rate, and adapt to high-demand products.
6. **Glue viscosity automatic control system**: according to the predetermined viscosity of the glue characteristics, the viscosity and temperature of the glue can be automatically controlled to ensure that the glue has continuous and stable characteristics during use.
7. **Automatic mold change function**: through the man-machine interface to create or retrieve the pre-stored product formula, one-key switching through the servo drive to quickly and accurately adjust the position, reducing the product switching time.
8. **Double-station molding**: through the efficient cooperation of the motion control module and the servo, a group of molding stations is added to reduce the waiting time for molding, improve the output efficiency of finished products under the same conditions as gluing, positioning, and pasting angles, and achieve stable and high-speed production. output, increase the output per unit time, effectively save energy and reduce costs.
9. **The cam box can participate in the motion control as a whole**: the four sets of wrapping cam boxes can independently participate in the wrapping operation according to the product characteristics, and expand the function development of special-shaped boxes.







我们的相关机器设备可以用来制造各种不同的天地盖盒子，主要应用到制造礼品盒、手机盒、珠宝盒、化妆品盒，服饰盒以及其他各种不同的盒子。

我们不仅仅为客户提供质量稳定的机械设备还提供全面的解决方案。


Our related machinery equipments are used to make different kinds of rigid boxes, including gift boxes, cell phone boxes, cosmetic boxes, garment boxes and other related boxes.

We not only supply good quality machinery equipments but also offer the whole solution project.

礼品盒 ≡ Gift Boxes

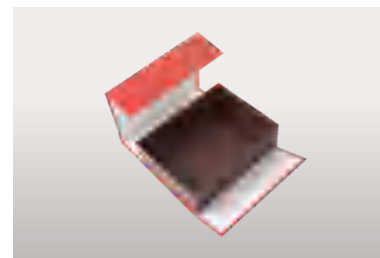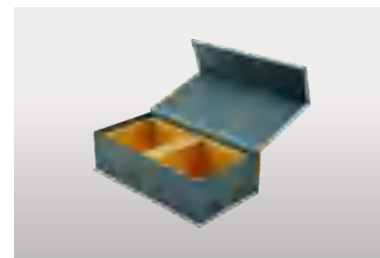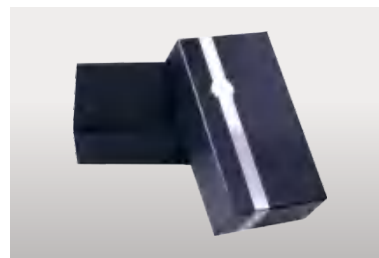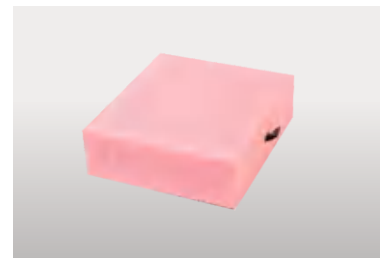

首饰盒 ≡
Jewelry Boxes

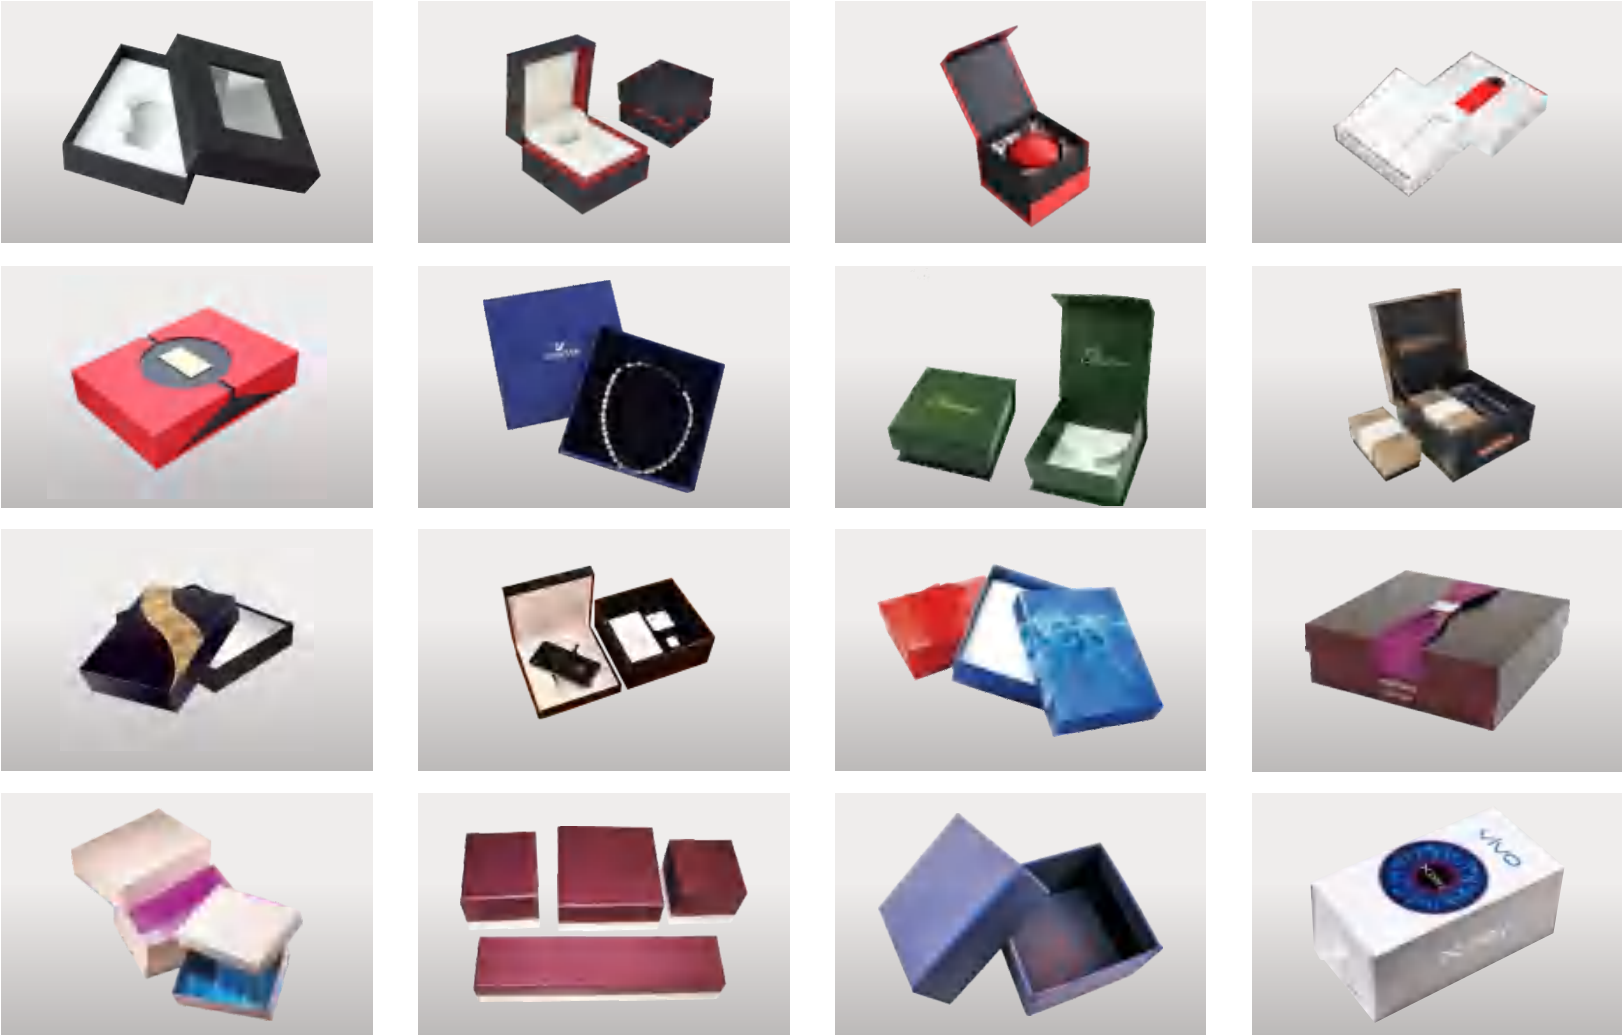


塑胶盒 ≡
Plastic Boxes



开槽 ≡
Notching



其他盒 ≡
Other Boxes

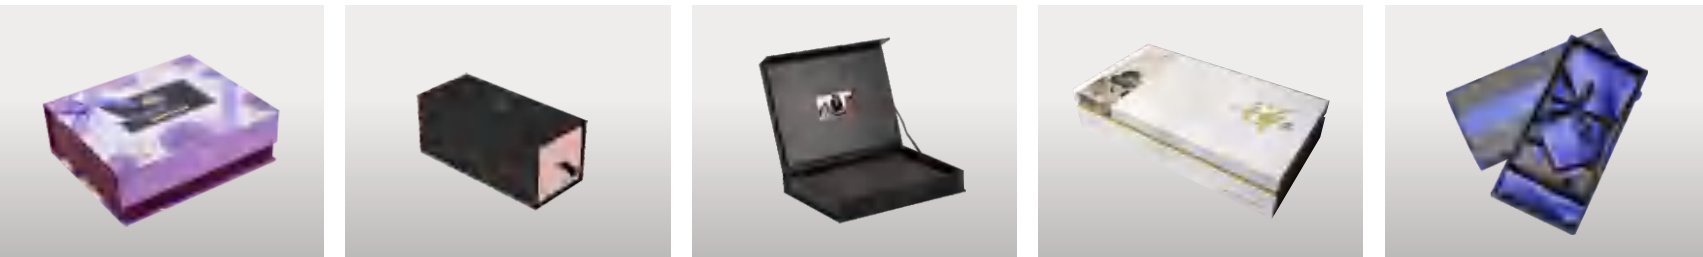

相册/台历
/皮壳 ≡
Photo Album/
Calendar/
Hard Cover

